

## 100 Gb/s 40 km QSFP28 ER4 Transceiver

---

### QSFP Series



- Support line rates from **103.125 Gb/s**
- Transmission data rate up to **25.78125Gbps per channel**
- Single **+3.3V Power Supply**
- Support Commercial and Industrial Temperature
- Low Power Consumption
- Complies with EU Directive 2015/863/EU

Ascent's 100G QSFP28 ER4 is designed for 40km optical communication applications. This module contains 4-lane optical transmitter, 4-lane optical receiver and module management block including 2 wire serial inter-face. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector.

Ascent's 100G QSFP28 ER4 Optical Transceiver offers service providers, network operators 100 Gigabit Ethernet connectivity options for data center networking, enterprise core aggregation, and service provider transport applications. It integrates receiver and transmitter path on one module.

In the transmit side, four lanes of serial data streams are recovered, retimed, and passed to four laser drivers. The laser drivers control 4-DML with center wavelength of 1296 nm, 1300nm, 1305nm and 1309 nm. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector.


In the receive side, the four lanes of optical data streams are optically de-multiplexed by the integrated optical de-multiplexer. Each data stream is recovered by a APD and trans-impedance amplifier, retimed. This module features a hot-pluggable electrical interface, low power consumption and 2-wire serial interface.

This product is designed with form factor, optical/electrical connections, and digital diagnostic interface according to the QSFP28 Multi-Source Agreement (MSA) and compliant to IEEE 802.3bm.

## Key Features


- Support line rates from 103.125 Gb/s
- Transmission data rate up to 25.78125Gbps per channel
- Up to 40km transmission on single mode fiber
- LAN WDM DML laser and APD
- High speed I/O electrical interface (CAUI-4)
- I2C interface with integrated Digital Diagnostic monitoring
- QSFP28 MSA package with duplex LC connector
- Single +3.3V power supply consumption  
Commercial: < 4.5W  
Industrial: <5.5W
- Temperature Range:  
Commercial: 0°C to +70°C  
Industrial: -40°C to +85°C
- Complies with EU Directive 2015/863/EU

## Outline Dimensions

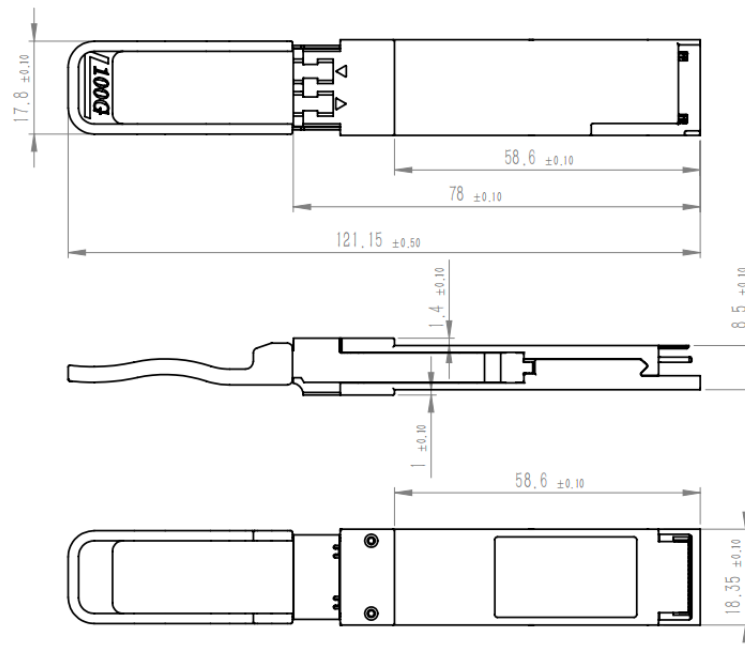


## EEPROM Information

EEPROM memory map specific data field description is as below:

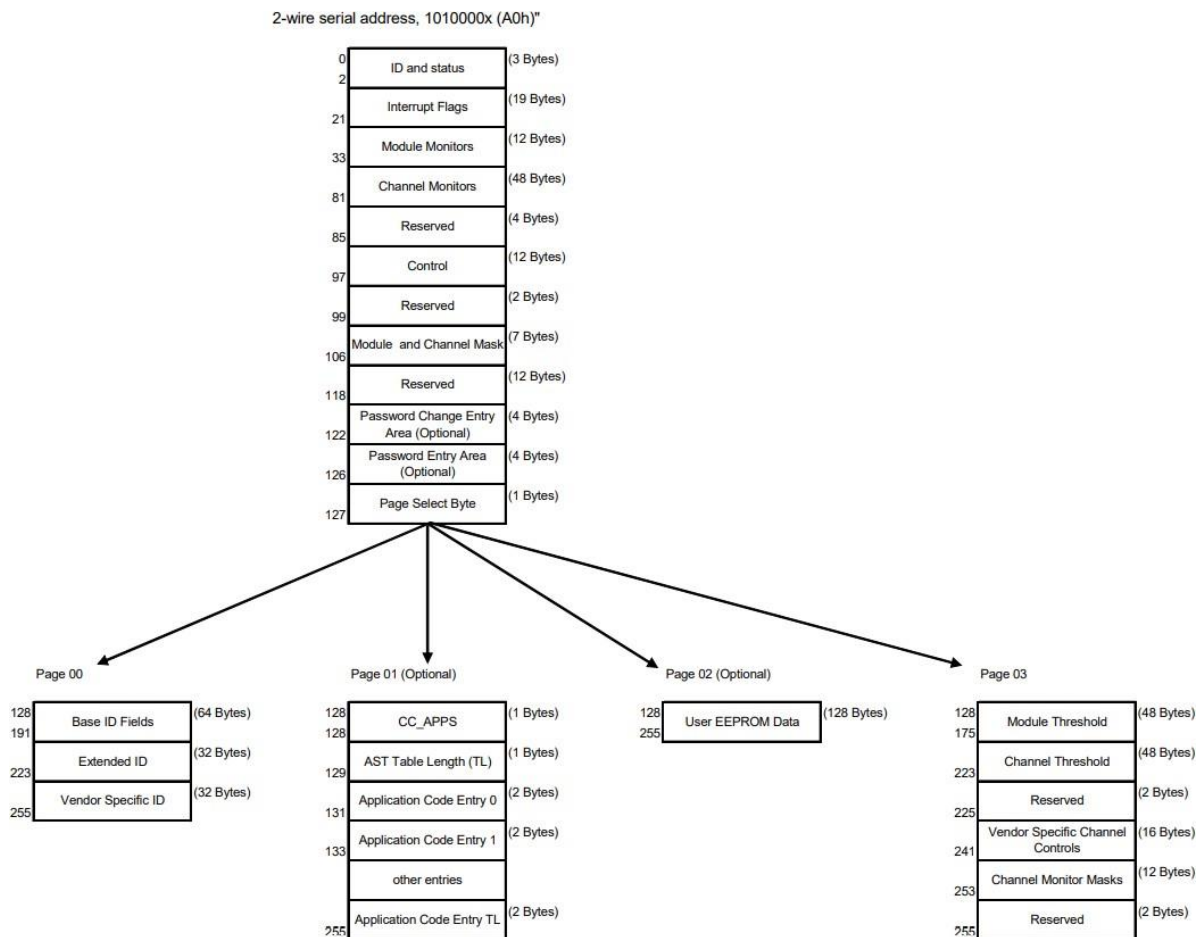

## Pin Assignment

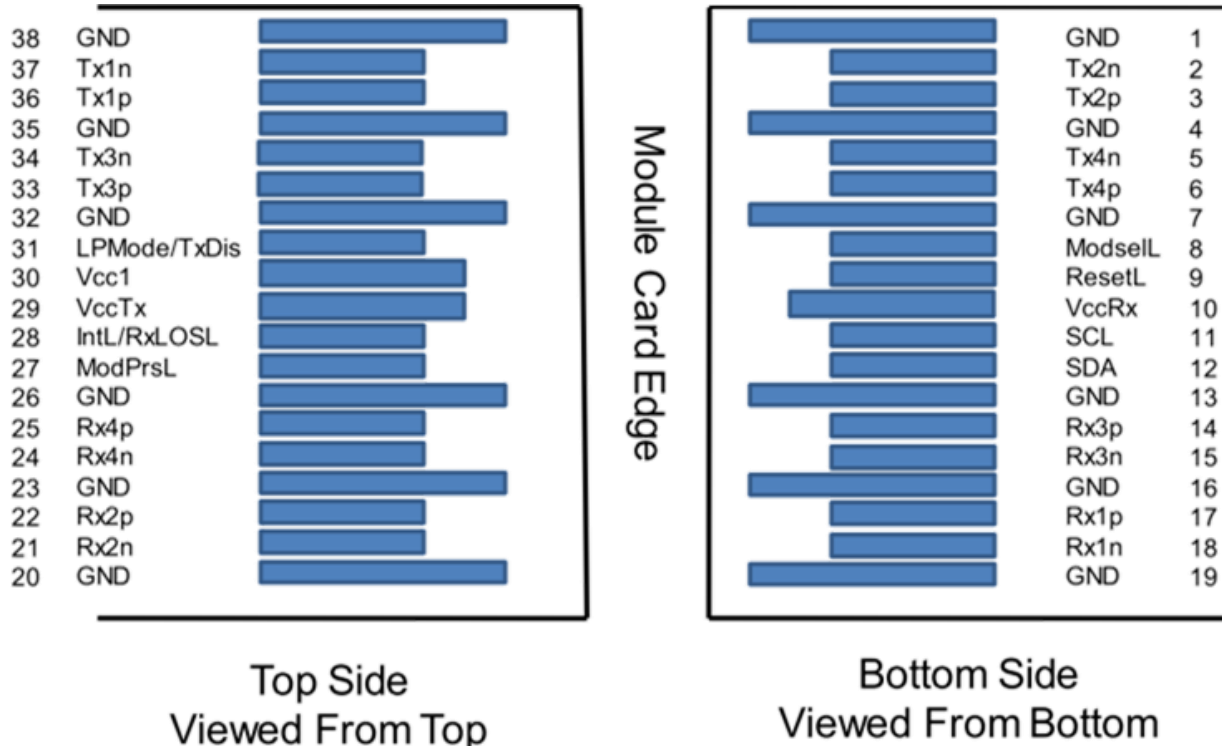

Pin	Logic	Symbol	Description	Plug Seq.	Notes
1		GND	Ground	1	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	3	
4		GND	Ground	1	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3	
6	CML-I	Tx4p	Transmitter Non-Inverted Data output	3	
7		GND	Ground	1	1
8	LVTTLL-I	ModSelL	Module Select	3	
9	LVTTLL-I	ResetL	Module Reset	3	
10		VccRx	+ 3.3V Power Supply Receiver	2	2
11	LVCNOS-I/O	SCL	2-Wire Serial Interface Clock	3	
12	LVCNOS-I/O	SDA	2-Wire Serial Interface Data	3	
13		GND	Ground	1	
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	3	
15	CML-O	Rx3n	Receiver Inverted Data Output	3	
16		GND	Ground	1	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3	
18	CML-O	Rx1n	Receiver Inverted Data Output	3	
19		GND	Ground	1	1
20		GND	Ground	1	1
21	CML-O	Rx2n	Receiver Inverted Data Output	3	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3	
23		GND	Ground	1	1

Pin	Logic	Symbol	Description	Plug Seq.	Notes
24	CML-O	Rx4n	Receiver Inverted Data Output	3	1
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	3	
26		GND	Ground	1	1
27	LVTTL-O	ModPrsL	Module Present	3	
28	LVTTL-O	IntL/Rx_LOS	Interrupt/Rx_LOS	3	
29		VccTx	+3.3 V Power Supply transmitter	2	2
30		Vcc1	+3.3 V Power Supply	2	2
31	LVTTL-I	LPMode/TxDIS	Low Power Mode/Tx_Disable	3	
32		GND	Ground	1	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	3	
34	CML-I	Tx3n	Transmitter Inverted Data Output	3	
35		GND	Ground	1	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Output	3	
38		GND	Ground	1	1

## Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in MSA. The connector pins are each rated for a maximum current of 1000 mA.

## Digital Diagnostic

Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70	°C	±3°C	Internal / External
Voltage	3.0 to 3.6	V	±3%	Internal / External
Bias Current	30 to 100	mA	±10%	Internal / External
TX Power	-1 to 6.5	dBm	±3dB	Internal / External
RX Power	-23 to -3.5	dBm	±3dB	Internal / External

## Note:

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA). The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

## Specifications

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T <sub>s</sub>	-40	85	°C
Maximum Supply Voltage	V <sub>CC</sub>	-0.5	3.6	V
Operating Relative Humidity	RH		85	%

### Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Case Temperature	T <sub>op</sub>	0		+70	°C	QSFP28-100G-ER4
		-40		+85	°C	Q28-100G-ER4A
Power Supply Voltage	V <sub>CC</sub>	3.13	3.3	3.47	V	
Power Supply Current	I <sub>CC</sub>	-		1.36	A	QSFP28-100G-ER4
				1.67	A	Q28-100G-ER4A
Maximum Power Consumption	P <sub>D</sub>			4.5	W	QSFP28-100G-ER4
				5.5	W	Q28-100G-ER4A
Aggregate Bit Rate	BR <sub>AVE</sub>		103.125		Gb/s	
Lane Bit Rate	BR <sub>LANE</sub>		25.78125		Gb/s	
Transmission Distance	T <sub>D</sub>			40	km	
Coupled Fiber	Single-mode fiber					9/125 μm SMF

### Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
Signaling Speed per Lane			25.78125		Gbps	
Lane Wavelength	L0	1294.53	1295.56	1296.59	nm	
	L1	1299.02	1300.05	1301.09	nm	
	L2	1303.54	1304.58	1305.63	nm	
	L3	1308.09	1309.14	1310.19	nm	
Total Average Launch Power	P <sub>T</sub>			12.5	dBm	1
Average Launch Power per Lane, OMA, each Lane	P <sub>avg</sub>	0		6.5	dBm	1
	P <sub>OMA</sub>	0.5		6.5	dBm	1
Difference in launch power between any two lanes(Average and OMA) between any Two Lanes (OMA)	P <sub>tx, diff</sub>			3	dB	
Average Output Power (Laser Turn off)	P <sub>off</sub>			-30	dBm	
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio, 100GE	ER	4.5			dB	
RIN20OMA	RIN			-130	dB/Hz	
Optical Return Loss Tolerance	TOL			20	dB	
Transmitter Reflectance	R <sub>T</sub>			-26	dB	
Optical Eye Mask	{0.25,0.4, 0.45, 0.25, 0.28, 0.4}				%	2
<b>Receiver</b>						
Signaling Rate, Each Lane			25.78125		Gbps	

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Center Wavelength Lane 0	$\lambda_0$	1294.53	1295.56	1296.59	nm	
Center Wavelength Lane 1	$\lambda_1$	1299.02	1300.05	1301.09	nm	
Center Wavelength Lane 2	$\lambda_2$	1303.5	1304.58	1305.63	nm	
Center Wavelength Lane 3	$\lambda_3$	1308.0	1309.14	1310.19	nm	
Damage threshold , Each Lane	Pdamage	-6			dBm	
The value of Rx DDM (LOS is asserted)				-40	dBm	
The value of Rx DDM (no power in put.)				-40	dBm	
Receiver sensitivity, each lane	SEN			-16	dBm	3
Los Assert	LosA	-30			dBm	
Los De-assert	LosDA			-22	dBm	
Los Hysteresis	LosH	0.5			dB	

## Note:

1. The optical power is launched into SMF.
2. Measured with a PRBS 2<sup>31</sup>-1 test pattern @25.78125, Hit ratio≤5E-5.
3. Measured with a PRBS 2<sup>31</sup>-1 test pattern @25.78125 Gb/s, BER≤1E-12.

## Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Notes
<b>Transmitter (Module Input)</b>						
Data Rate, Each Lane			25.78125		Gbps	
Differential Voltage pk-pk	Vpp			900	mV	1
Common Mode Voltage	Vcm	-350		2850	mV	
Transition Time	Trise/Tf all	10			ps	2
<b>Receiver (Module Output)</b>						
Data Rate, Each Lane			25.78125		Gbps	
Common Mode Noise, RMS	Vrms			17.5	mV	
Differential Output Voltage Swing	Vout, pp			900	mV	
Eye Width	EW15	0.57			UI	
Eye Height	EH15	228			mV	
Differential Termination Resistance Mismatch				10	%	1
Transition Time	Trise/Tf all	12			ps	

## Note:

1. At 1 MHz
2. 20% to 80%.

## Ordering Information

Product Name	Product Description
QSFP28-100G-ER4	QSFP28 Plug-in, 100G-ER4, 40km, 1310nm Optical Transceiver, LC, DOM
QSFP28-100G-ER4A	QSFP28 Plug-in, 100G-ER4, 40km, 1310nm Optical Transceiver, LC, DOM, -40 to 85°C
Q28-100G-ER4	QSFP28 Plug-in, 100G-ER4, 40km, 1310nm Optical Transceiver, LC, DOM, Compatible with Juniper
Q28-100G-ER4A	QSFP28 Plug-in, 100G-ER4, 40km, 1310nm Optical Transceiver, LC, DOM, -40 to 85°C, Compatible with Juniper

## Contact Information



### Ascent Communication Technology Ltd

#### AUSTRALIA

140 William Street, Melbourne  
Victoria 3000, AUSTRALIA  
Phone: +61-3-8691 2902

#### Hong Kong SAR

Room 1210, 12th Floor, Wing Tuck Commercial Centre  
181 Wing Lok Street, Sheung Wan , Hong Kong SAR  
Phone: +852-2851 4722

#### CHINA

Unit 1933, 600 Luban Road  
200023, Shanghai, CHINA  
Phone: +86-21-60232616

#### USA

2710 Thomes Ave  
Cheyenne, WY 82001, USA  
Phone: +1 203 350 9822

#### EUROPE

Pfarrer-Bensheimer-Strasse 7a  
55129 Mainz, GERMANY  
Phone: +49 (0) 6136 926 3246

#### VIETNAM

11th Floor, Hoa Binh Office Tower  
106 Hoang Quoc Viet Street, Nghia Do Ward  
Cau Giay District, Hanoi 10649, VIETNAM  
Phone: +84-24-37955917

**WEB:** [www.ascentcomtec.com](http://www.ascentcomtec.com)

**EMAIL:** [sales@ascentcomtec.com](mailto:sales@ascentcomtec.com)

Specifications and product availability are subject to change without notice.  
Copyright © 2025 Ascent Communication Technology Limited. All rights reserved.  
Ver. ACT\_QSFP28-100G-ER4\_Datasheet\_V1b\_May\_2024