

100 Gb/s 2km QSFP28 CWDM4 Transceiver

QSFP28 Series

- **Hot-pluggable QSFP28 from factor**
- **Supports 103.1Gb/s aggregate bit rate**
- **Supports 4X25Gb/s CWDM transmitter and PIN/TIA receiver**
- **2km on Single Mode Fiber**
- **Single 3.3V power supply**
- **Maximum power dissipation<3.5W**
- **RoHS-6 compliant and lead-free**



Ascent's QSFP28-100G-LP02 transceiver modules are designed for use in 100 Gigabit Ethernet links over single mode fiber. They are compliant with the QSFP28 MSA, CWDM4 MSA, IEEE 802.3ba and IEEE 802.3bm. They are suitable to be used in various applications, such as data centers, high-performance computing networks, enterprise core and distribution layer applications.

The central wavelengths of the 4 CWDM channels are 1271, 1291, 1311 and 1331 nm. It contains a duplex LC connector for the optical interface and a 38-pin connector for the electrical interface. This product converts the 4-channel 25Gb/s electrical input data into CWDM optical signals (light), by a 4-wavelength Distributed Feedback Laser (DFB) TO.


The 4 wavelengths are multiplexed into a single 100Gb/s data, propagating out of the transmitter module via the SMF. The receiver module accepts the 100Gb/s optical signals input, and de-multiplexes it into 4 CWDM 25Gb/s channels. Each wavelength light is collected by a discrete photo diode, and then outputted as electric data after amplified by a TIA.

The product is designed with form factor, optical/electrical connection and digital diagnostic interface according to the QSFP28 Multi-Source Agreement (MSA). The optical transceiver is compliant per the RoHS Directive 2011/65/EU.


Key Features

- Supports 103.1Gb/s aggregate bit rate
- 4x25Gb/s electrical interface
- 4X25Gb/s CWDM transmitter and PIN/TIA receiver
- Maximum link length of 2km on Single Mode Fiber (SMF)
- Hot-pluggable QSFP28 from factor
- Single 3.3V power supply
- Integrated 4-channel CWDM mux/Demux for duplex LC operation
- Duplex LC receptacles
- Maximum power dissipation<3.5W
- RoHS-6 compliant and lead-free
- I2C management interface
- Commercial operating temperature: 0°C to +70°C

Outline Diagram

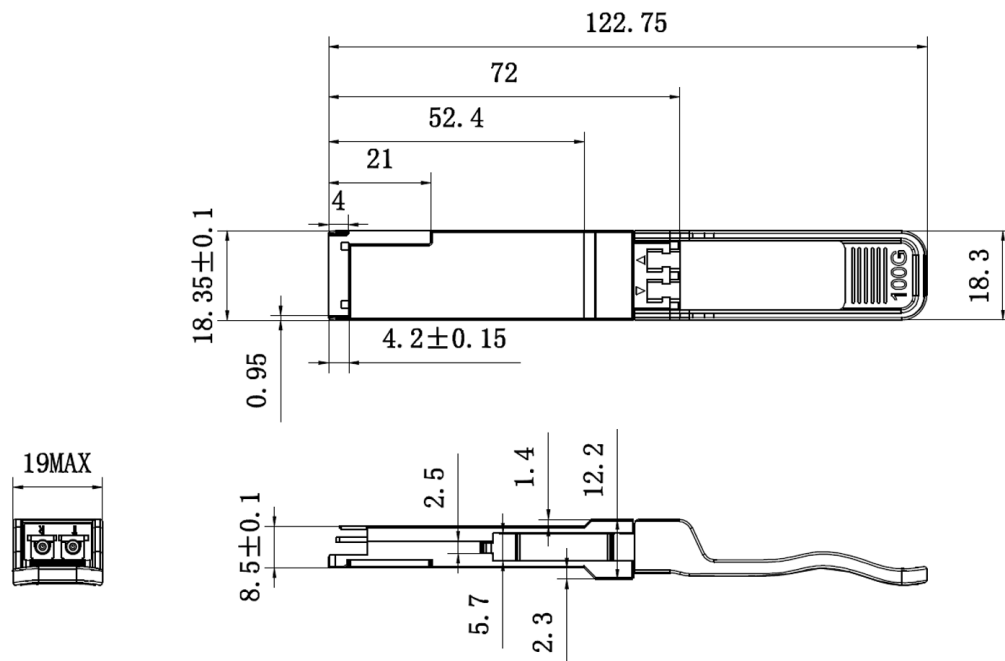

Pin Assignment

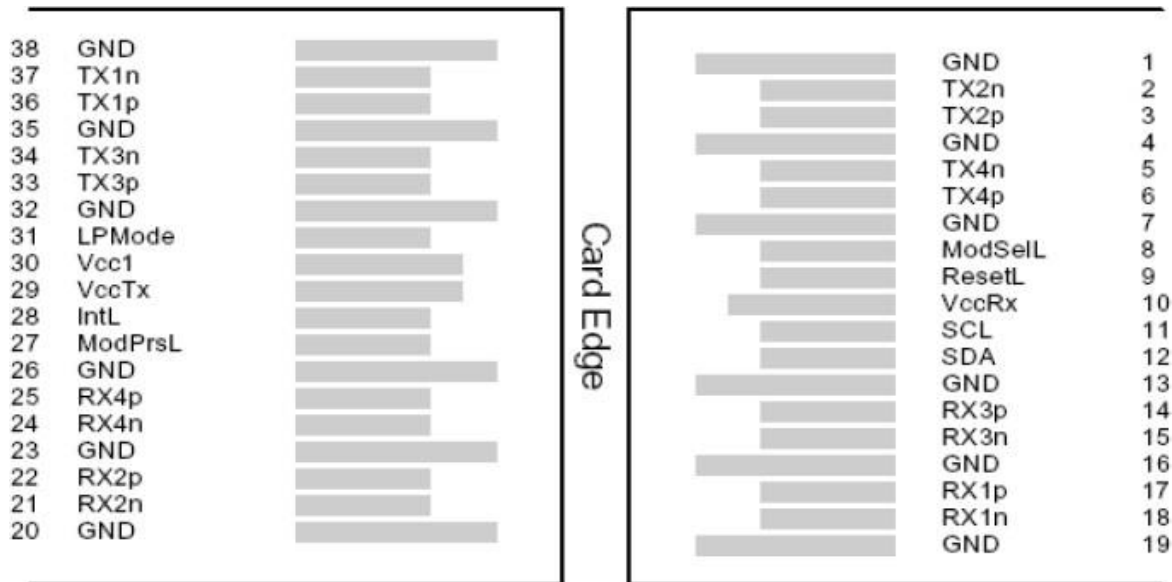

Top Side
Viewed from Top

Bottom Side
Viewed from Bottom

Pin	Symbol	Name/Description	Note
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	1
8	ModSe1L	Module Select	
9	ResetL	Module Reset	
10	Vcc Rx	+3.3V Power supply receiver	
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	1
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrSL	Module Present	

28	IntL	Interrupt	
29	VccTx	+3.3V Power supply transmitter	
30	Vcc1	+3.3V Power Supply	
31	LPMode	Low Power Mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	
35	GND	Ground	1
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Input	
38	GND	Ground	1

Note:

1. Circuit ground is internally isolated from chassis ground.

Specifications

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	T _s	-40	--	85	°C	
Storage Ambient Relative Humidity	H _A	0	--	85	%	
Maximum Supply Voltage	V _{CC}	-0.5	--	3.6	V	
Lead Soldering Temperature/Time	TSOLD	--	--	260/10	°C /sec	1
Lead Soldering Temperature/Time	TSOLD	--	--	360/10	°C /sec	2

Note:

1. Suitable for wave soldering.
2. Only for soldering by iron.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Transmitter(per lane)						
Signaling Speed per Lane		25.78125 ± 100 ppm			Gb/s	1
Center Wavelength	λ_c	--	1264.5 – 1277.5 1284.5 – 1297.5 1304.5 – 1317.5 1324.5 – 1337.5	--	nm	
Extinction Ratio	ER	3.5	--	--	dB	
Side Mode Suppression Ratio	SMSR	30	--	--	dB	
Total Average Launch Power	Ptot	--	--	8.5	dBm	
Average Launch Power, Each Lane	Po	-6.5	--	2.5	dBm	
OMA, Each Lane	OMA	-4	--	2.5	dBm	CW,ER >3.5dB
Difference in Launch Power between Any Two Lanes (OMA)				5	dB	
TDP, Each Lane	TDP			3.0	dB	2
Average Launch Power of OFF Transmitter, Each Lane	Poff			-30	dBm	
Transmitter Eye Mask Definition {X1,X2,X3,Y1,Y2,Y3}		{0.31, 0.40, 0.45, 0.34, 0.38, 0.4}				3
Receiver(per lane)						
Signaling Speed per Lane		25.78125 ± 100 ppm			Gb/s	4
Input Optical Wavelength	λ_{IN}		1264.5 – 1277.5		nm	

					1284.5 – 1297.5 1304.5 – 1317.5 1324.5 – 1337.5	
Damage Threshold		3.5				dBm
Receiver Power (OMA), Each Lane		2.5				dBm
Rx Sensitivity(OMA) per Lane	R _{SENS}			-10		dBm 5
Stressed Receiver Sensitivity (OMA), Each Lane	SRS			-7.3		dBm 6
Conditions of stressed receiver sensitivity test						
Vertical Eye Closure Penalty, Each Lane	VECP	1.9			dB	
Stressed Eye J2 Jitter, Each Lane	J2	0.33			UI	
Stressed Eye J4 Jitter, Each Lane	J4	0.48			UI	
SRS Eye Mask Definition {X1, X2, X3, Y1, Y2, Y3}				{0.39, 0.50, 0.50, 0.39, 0.39, 0.4}		
Loss of Signal Assert	P _A	-24		-13.6		dBm
Loss of Signal De-assert	P _D			-11.6		dBm
LOS Hysteresis	P _D - P _A	0.5		6		dB

Note:

1. Transmitter consists of 4 lasers operating at 25.78 Gb/s each.
2. TDP value does not include MPI penalty.
3. Hit ratio of 5×10^{-5} , per IEEE.
4. Receiver consists of 4 photodetectors operating at 25.78 Gb/s each.
5. Sensitivity is specified at 5×10^{-5} BER.
6. Measured with CWDM4 MSA2 conformance test signal at TP3 for 5×10^{-5} BER.

Electrical Interface Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V _{CC}	3.135		3.465	V	
Supply Current	I _{CC}			1.12	A	
Module Total Power	P			3.5	W	1
Transmitter						
Signaling Rate per Lane		25.78125 ± 100ppm			Gb/s	
Differential Data Input Swing per Lane	V _{in} , pp	900			mV	
Differential Input Return Loss(min)	RL _d (f)	9.5 – 0.37f, 0.01 ≤ f < 8			dB	
Differential to Common Mode Input Return Loss(min)	RL _{dc} (f)	4.75 – 7.4log ₁₀ (f/14), 8 ≤ f < 19			dB	
		22 – 20(f/25.78), 0.01 ≤ f < 12.89			dB	
		15 – 6(f/25.78), 12.89 ≤ f < 19			dB	
Differential Termination Mismatch				10	%	

Eye Width		0.46	UI
Applied Pk-Pk Sinusoidal Jitter		Per IEEE802.3bm Table 88-13	--
Eye Height		95	mV
Receiver			
Signaling Rate per Lane		25.78125±100ppm	Gb/s
Differential Data Output Wwing	V _{out} , pp	100 400 300 600 400 600 600 1200	mVpp 2
Eye Width		0.57	UI
Vertical Eye Closure	VEC	5.5	dB
Differential Output Return Loss (min)	RLd(f)	9.5-0.37f, 0.01≤f<8 4.75-7.4log10(f/14), 8≤f<19	dB
Common to Differential Mode Conversion	RLdc(f)	22-20(f/25.78), 0.01≤f<12.89 15-6(f/25.78), 12.89≤f<19	dB
Return Loss (min)			
Differential Termination Mismatch		10	%

Note:

1. Maximum total power value is specified across the full temperature and voltage range.
2. Output voltage is settable in 4 discrete range via I2C.Default range is Range 2 (400 – 800mV).


Digital Diagnostic Functions

Ascent's QSFP28-100G-LP02 supports transceivers support the I2C-based diagnostics interface specified by the QSFP28 MSA Transceiver temperature.

Ordering Information

Product Name	Product Description
QSFP28-100G-LP02	QSFP28 Plug-in, 100Gbps, 2 km, 4 CWDM wavelength (1271, 1291, 1311, 1331 nm) on single-mode fiber, LC Connector

Contact Information

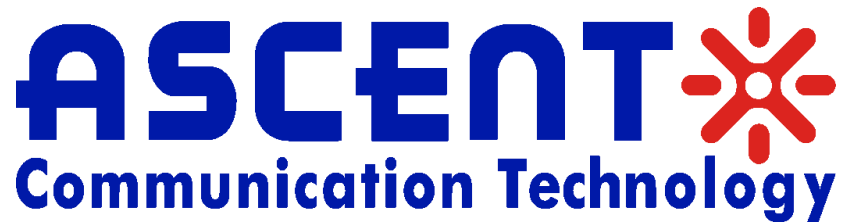

Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

Hong Kong SAR

Room 1210, 12th Floor, Wing Tuck Commercial Centre
181 Wing Lok Street, Sheung Wan , Hong Kong SAR
Phone: +852-2851 4722

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai, CHINA
Phone: +86-21-60232616

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1 203 350 9822

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

VIETNAM

11th Floor, Hoa Binh Office Tower
106 Hoang Quoc Viet Street, Nghia Do Ward
Cau Giay District, Hanoi 10649, VIETNAM
Phone: +84-24-37955917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2025 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_QSFP28-100G-LP02_Datasheet_V1d_Dec_2019