

RON1512 RFoG Node

RON1500 Series



- Supports 1.2GHz RF pass band
- Single fiber WDM for forward and return path
- 1550nm forward, 1610nm return
- AGC optical input range of -8dBm to 0dBm
- 32dBmV RF output level
- RF test points for forward and reverse path
- Easy installation
- LED indicators
- Low power consumption

Ascent RON1512 is a compact, high-performance 1.2 GHz two-way optical node designed for DOCSIS FTTH architectures. Engineered for superior forward and return path performance, it combines high reliability, simplified installation, and a user-friendly layout. The integrated optical AGC automatically maintains a consistent RF output level in every home, while the burst-mode return transmitter activates the laser only when a return signal is detected.


As part of ACT's FTTx solution suite, the RON1512 supports 1550 nm forward-path RF transmission and 1610 nm return-path upstream signals. It integrates a low-noise optical receiver and an isolated DFB laser to modulate return-path signals from set-top boxes (STBs) or DOCSIS modems onto the fiber.

Utilizing single-fiber WDM transmission, the RON1512 supports both data and analog signal transport, ensuring seamless operation within existing HFC network infrastructures. Its simplified network structure reduces active components, enhances overall reliability, and lowers operational costs. Fully compliant with the SCTE 174 2010 standard, the RON1512 delivers a cost-effective, standards-based solution for next-generation RFoG and FTTH deployments.

Key Features

- Supports 1.2GHz RF pass band
- Single fiber WDM for forward and return path
- 1550nm forward, 1610nm return
- AGC optical input range of -8dBm to 0dBm
- 32dBmV RF output level
- RF test points for forward and reverse path
- Easy installation
- LED indicators for optical input, output and power
- Compact form factor
- Low power consumption

Block Diagram

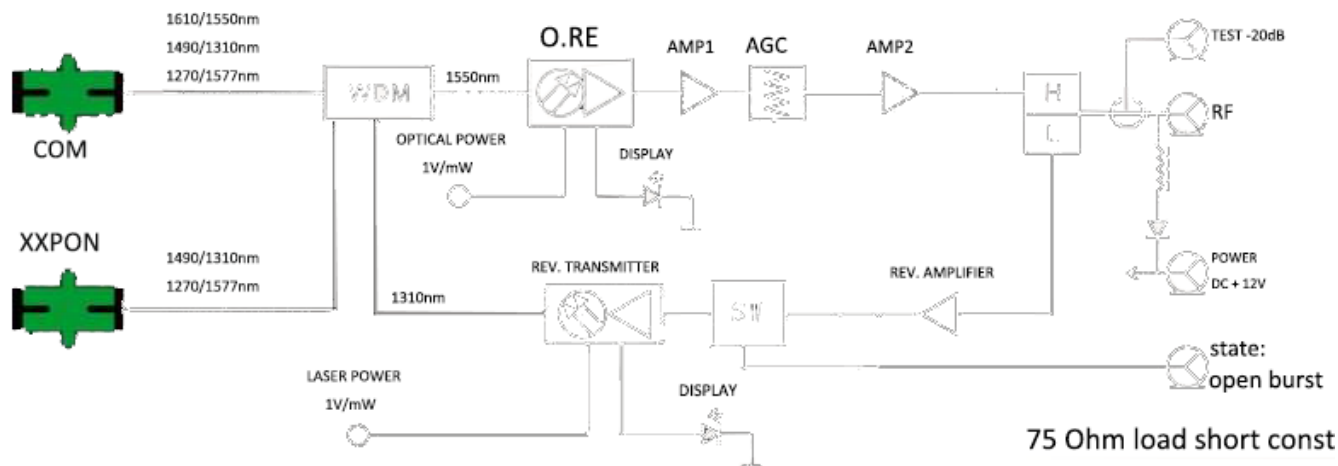

Specifications

Downlink Characteristics

Parameter	Technical Parameters	Condition
Wavelength	1550nm to 1560nm	
Responsivity	0.8A/W	VR=5V, λ =1550nm
Optical Received	-8dBm to +2dBm	
RF Output Power @ 550 MHz	90dBmV to 92dBmV	-8 to 0 dBm opticalInput, (AGC) OMI 3.5%
Optical AGC Time Constant	1sec	
RF Response Tilt (54 to 1002MHz)	3.0dB to 4.0 dB(Typical 3.5dB)	54 to 1002
RF Flatness(Fit to Linear slope)	-1.0dB to +1.0dB	54 to 1002
RF Return Loss, 75 ohm	15dB(Typical 16dB)	
CNR @ -6 dBm	48dB	Note 1
CSO @ 0 dBm	-60dBc	
CTB @ 0 dBm	-60dBc	

Uplink Characteristics

Parameter	Technical Parameters	Condition
Wavelength (1610nm Option)	1610nm	CW, Tc=0 to +20
RF Operating Frequency	5MHz to 42MHz	42/54Mhz; 65/85MHz(Optional)
RF Flatness	-1dB to +1dB	
RF Return Loss, 75ohm	15dB(Typical 16dB)	
Input Dynamic Range	15dBmV to 40dBmV	
Power at Which Optical Turn On / Off		Double threshold, accord with the latest SCTL 174 2010 standard.
NPR Dynamic Range	20	
Tx Optical Power, High	0dBm(Typical 1dBm)	RF input power>RF Threshold power
Tx Optical Power, Off	-20dBm	RF input power<RF Threshold power
Turn-on Time	<700ns	
Turn-off Time	<700ns	

General Characteristics

Parameter	Technical Parameters	Condition
Optical Connector	SC/APC, FC/APC, SC/UPC	
Operating Temperature	-20°C to 55°C	
Storage Temperature	-40°C to 85°C	
Power Supply	100VAC to 240VAC	
Operating Relative Humidity	5% to 95%	
Power Consumption	7W	
Dimensions (W × D × H)	210mm x 156mm x 50mm	
Weight	0.93kg	

Note1: 1.79PAL-D/K (-6dB)channel loading up to 1 GHz, 20 Km fiber + passive loss; tested within the full temperature range and specified received optical power range.

Ordering Information

RON1500 Series RFoG ONU Ordering Information							
RON15	XX-	XX	X-	XX-	XX-	XX-	X
	↓	↓	↓	↓	↓	↓	↓
	RF Bandwidth	Return Transmitter		Optical Connector		PON Upgrade Port	
10	1GHz	0	No Rtn	AS	SC/APC	0	No Upgrade Port
12	1.2GHz	A	1310 FP Rtn 0dBm	AF	FC/APC	P	PON Upgrade Port
		B	1310 FP Rtn 3dBm				
		C	1310 DFB Rtn 3dBm				
		D	1611 DFB Rtn 3dBm				
		Output Level	Band Split	Power Adaptor			
		82	82dBuV	42	42/54 MHz	00	None (RF Powering)
		92	92dBuV	65	65/85 MHz	01	Australia
			204	204/258 MHz	02	China	
					03	Continental Europe	
					04	North America	

References Part Numbers*

*Contact your local sales representatives for more configuration

RON1512-82-C-65-AS-03-0 RON1500 RFoG ONU 1.2GHz, 82dBuV, WDM, 3dBm DFB 1310nm RTX, 65MHz Rtn, SC/APC, +12V Power Adaptor with Continental EU Plug, No PON Port Upgrade

Contact Information



Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

Hong Kong SAR

Room 1210, 12th Floor, Wing Tuck Commercial Centre
181 Wing Lok Street, Sheung Wan , Hong Kong SAR
Phone: +852-2851 4722

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai, CHINA
Phone: +86-21-60232616

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1 203 350 9822

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

VIETNAM

11th Floor, Hoa Binh Office Tower
106 Hoang Quoc Viet Street, Nghia Do Ward
Cau Giay District, Hanoi 10649, VIETNAM
Phone: +84-24-37955917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.

Copyright © 2025 Ascent Communication Technology Limited. All rights reserved.

Ver. ACT_RON1512_RFoG_Node_Datasheet_V1b_Oct_2024