

## SFP BIDI 1.25G 1310/1490 nm 20 km DDM

---

### SFP Transceiver Series



- Up to 1.25 Gb/s data links
- DFB laser transmitter
- PIN photodetector
- Up to 20 km on 9/125  $\mu$ m SMF
- Hot-pluggable SFP footprint
- BIDI LC/UPC type pluggable optical interface
- Low power dissipation
- Metal enclosure for lower EMI
- RoHS compliant and lead-free
- Supports the Digital Diagnostic Monitoring interface
- Compliant with SFF-8472


ACT's SFP-AG-SP-4931 transceiver is a flexible solution as an interface for switches, routers, servers, and other optical links. This SFP transceiver can carry data links at rates up to 1.25 Gb/s, and is compatible with the SFP Multi-Sourcing Agreement (MSA). The transceiver module covers data link up to 20KM in 9/125um single mode fiber. It is BIDI with the 1310nm FP laser and the 1550nm DFB laser.

The optical output of the transceiver can be disabled by a high-level TTL TX disable input, and the module can also be disabled via I2C. TX fault is provided to indicate any degradation of the laser. A loss of signal (LOS) output is provided to indicate if there is any loss in the receiver input optical signal or if there are any problems with the link status of partner devices. The system can obtain the LOS /link /disable /fault information using an I2C register access.

## Key Features


- Up to 1.25 Gb/s data links
- DFB laser transmitter
- PIN photodetector
- Up to 20 km on 9/125μm SMF
- Hot-pluggable SFP footprint
- BIDI LC/UPC type pluggable optical interface
- Low power dissipation
- Metal enclosure for lower EMI
- RoHS compliant and lead-free
- Supports the Digital Diagnostic Monitoring interface
- Compliant with SFF-8472

## Outline Diagram

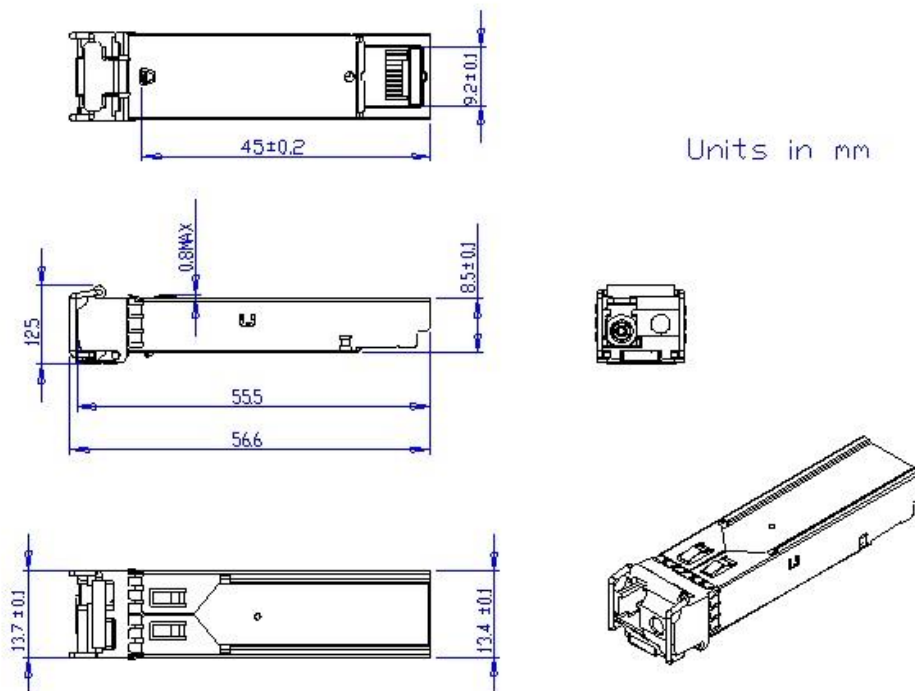


**SFP-AP-LP-4931-40D**

## Recommended Circuit Schematic

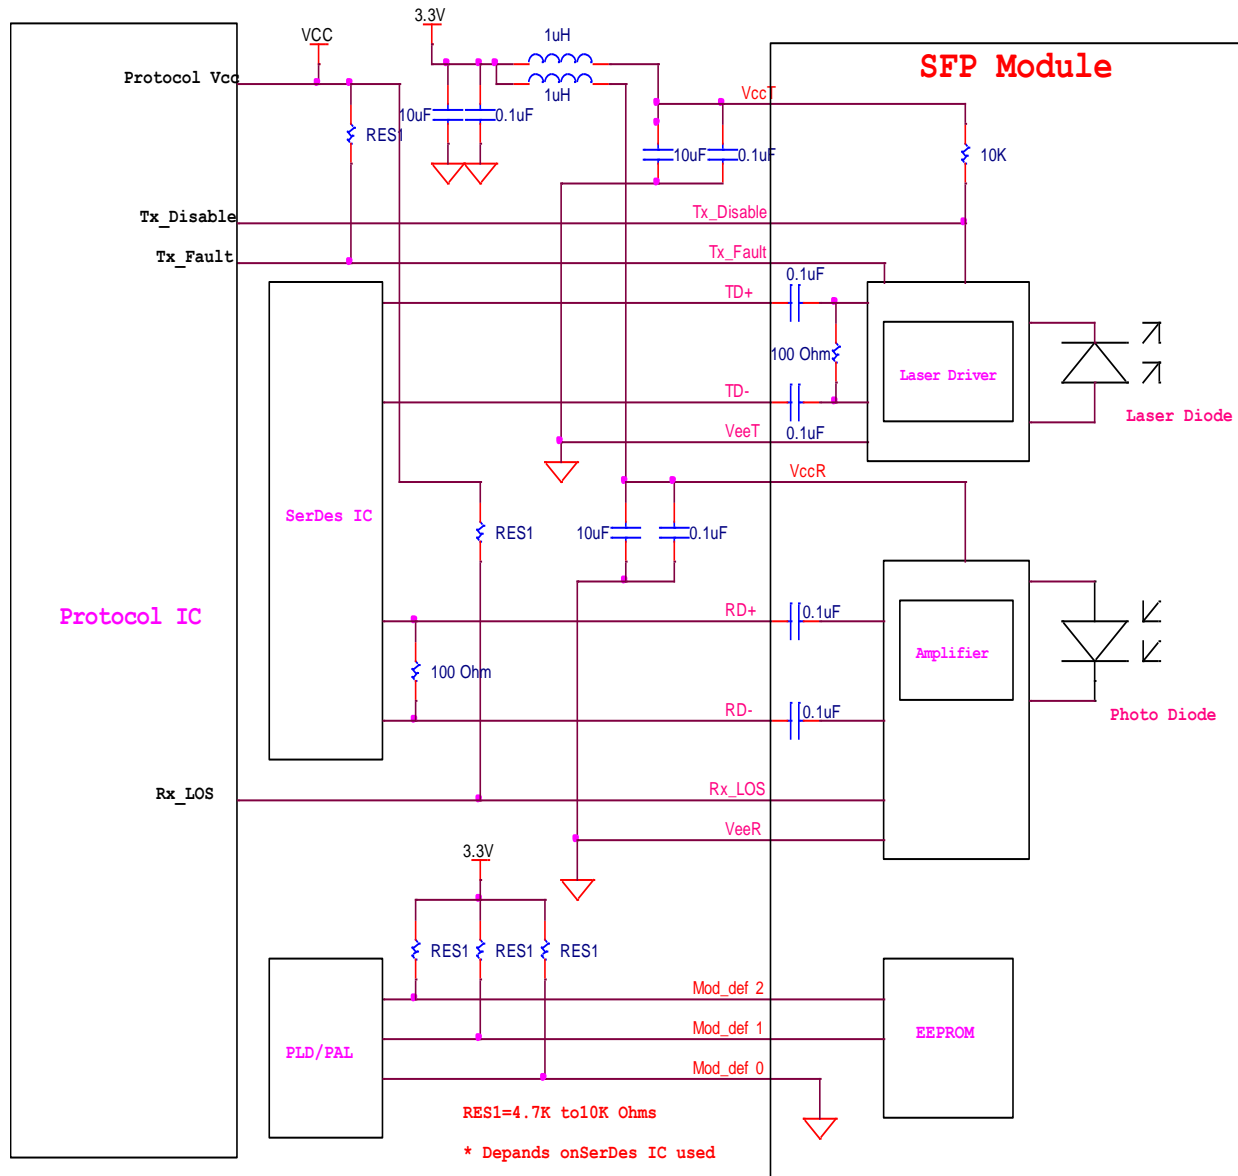

## Pin Descriptions

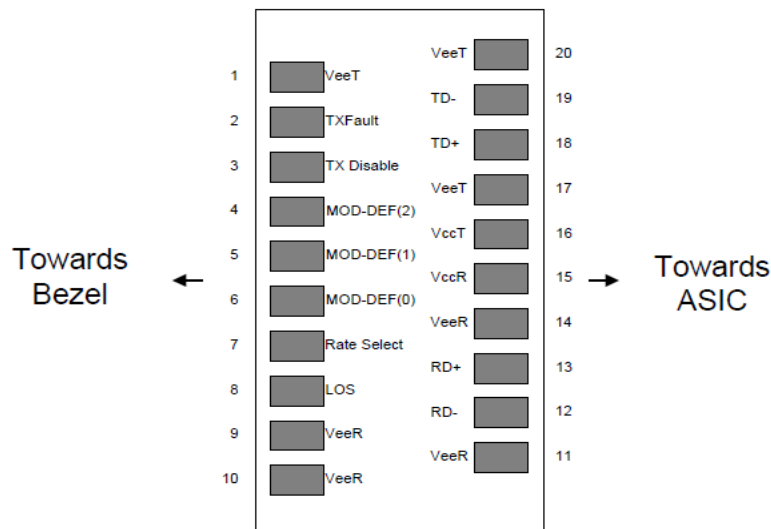

**Pin-out of Connector Block on Host Board**

Pin	Symbol	Name/Description	Note
1	VEET	Transmitter Ground (Common with Receiver Ground)	1
2	TFAULT	Transmitter Fault. Not supported.	-
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	3
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	3
7	Rate Select	No connection required.	4
8	LOS	Loss of Signal indicator. Logic 0 indicates normal operation.	5
9	VEER	Receiver Ground (Common with Transmitter Ground)	1
10	VEER	Receiver Ground (Common with Transmitter Ground)	1
11	VEER	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled.	-
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	-
14	VEER	Receiver Ground (Common with Transmitter Ground).	1
15	VCCR	Receiver Power Supply	-
16	VCCT	Transmitter Power Supply	-
17	VEET	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	-
19	TD-	Transmitter Inverted DATA in. AC Coupled.	-
20	VEET	Transmitter Ground (Common with Receiver Ground)	1

### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on  $T_{DIS} > 2.0V$  or open, enabled on  $T_{DIS} < 0.8V$ .
3. Module definition pins should be pulled up with 4.7 ~ 10 kΩ resistors on the host board to a voltage between

2.0V and 3.6V. MOD\_DEF(0) pulls the line low to indicate that the module is plugged in.

4. This is an optional input used to control the receiver bandwidth for compatibility with multiple data rates (most likely Fiber Channel 1x and 2x rates). If implemented, the input will be internally pulled down with a  $> 30k\Omega$  resistor. The input states are:

Low (0 – 0.8V):	Reduced Bandwidth
(>0.8V, < 2.0V):	Undefined
High (2.0 – 3.465V):	Full Bandwidth
Open:	Reduced Bandwidth

5. The LOS pin is for open collector output. It should be pulled up with a  $4.7 \sim 10 k\Omega$  resistor on the host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## Regulatory Compliance

Feature	Reference	Performance
Electrostatic Discharge (ESD)	IEC/EN 61000-4-2	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN 55022 Class B (CISPR 22A)	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2	Class 1 laser product
Component Recognition	IEC/EN 60950, UL	Compatible with standards
ROHS	2002/95/EC	Compatible with standards
EMC	EN61000-3	Compatible with standards

## Specifications

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	Ts	-40		85	°C	
Relative Humidity	RH	5		95	%	
Power Supply Voltage	VCC	-0.5		4	V	
Signal Input Voltage		-0.3		Vcc+0.3	V	
Receiver Damage Threshold		5			dBm	

### Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	Tcase	0		70	°C	SFP-AG-SP-4931
		-10		80		SFP-AG-SP-4931E
		-40		85		SFP-AG-SP-4931A
Power Supply Voltage	VCC	3.13	3.3	3.47	V	
Power Supply Current	ICC			280	mA	
Power Supply Noise Rejection				100	mVp-p	100 Hz to 1 MHz
Data Rate			1.25/1.25		Gbps	TX Rate/RX Rate
Transmission Distance				20	kM	
Coupled Fiber	Single-mode fiber					9/125 μm SMF


### Transmitter Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Average Output Power	POUT	-9		-3	dBm	1
Extinction Ratio	ER	9			dB	
Center Wavelength	λC	1290	1310	1330	nm	SFP-AG-SP-4931
		1470	1490	1510		SFP-AG-SP-3149
Side Mode Suppression Ratio	SMSR	30			dB	DFB Laser

Spectrum Bandwidth(-20dB)	$\sigma$	1	nm
Transmitter OFF Output Power	POff	-45	dBm
Differential Line Input Impedance	RIN	90 100 110	$\Omega$
Output Eye Mask	Compliant with IEEE802.3 z (class 1 laser safety)		

## Notes:

1. Measured at a 2<sup>7</sup>-1 NRZ PRBS pattern
2. Transmitter eye mask definition

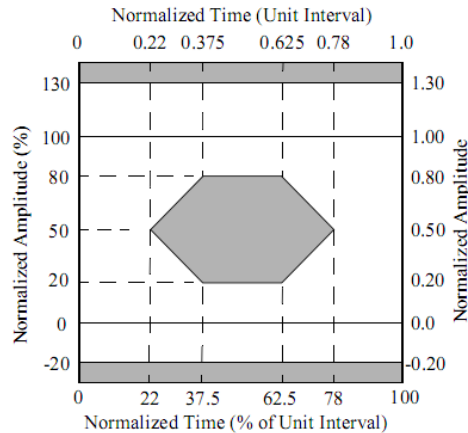

## Receiver Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Input Optical Wavelength	$\lambda_{IN}$	1470	1490	1510	nm	SFP-AG-SP-4931
		1290	1310	1330		SFP-AG-LP-3149
Receiver Sensitivity	PIN			-20	dBm	1
Input Saturation Power (Overload)	PSAT	-3			dBm	
Loss Of Signal Assert	PA	-35			dBm	
Loss Of Signal De-assert	PD			-22	dBm	2
LOS Hysteresis	PA-PD	0.5	2	6	dB	

## Notes

- 1: Measured with light source: 1490 nm (1310 nm), ER=9dB; BER =<10<sup>-12</sup> @PRBS=2<sup>7</sup>-1 NRZ.
- 2: When the LOS is de-asserted, the RX data+/- output is the signal output.

## Electrical Interface Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
<b>Transmitter</b>						
Total Supply Current	ICC			A	mA	1
Transmitter Disable Input-High	VDISH	2		V <sub>cc</sub> +0.3	V	
Transmitter Disable Input-Low	VDISL	0		0.8	V	
Transmitter Fault Input-High	VTxFH	2		V <sub>cc</sub> +0.3	V	

Transmitter Fault Input-Low	VTxFL	0	0.8	V	
<b>Receiver</b>					
Total Supply Current	ICC		B	mA	1
LOSS Output Voltage-High	VLOSH	2	V <sub>cc</sub> +0.3	V	LVTTL
LOSS Output Voltage-Low	VLOSL	0	0.8	V	

**Note:**

1: A (TX) + B (RX) = 280 mA (Not including termination circuit)

## Digital Diagnostic Functions

ACT SFP transceivers support the 2-wire serial communication protocol as defined in the SFP MSA. It is very closely related to the E2PROM defined in the GBIC standard, with the same electrical specifications.

The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, ACT SFP transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power, and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map in E2PROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to and thus fully backward compatible with both GBIC specifications and the SFP MSA.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into segments of the E2PROM that are not write-protected within the SFP transceiver. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

Digital diagnostics for the ACT SFP transceivers are internally calibrated by default.

## Ordering Information

Product Part Number	Data Rate	Media	Wavelength (nm)	Transmission	Temperature Range
---------------------	-----------	-------	-----------------	--------------	-------------------



	(Gbps)			Distance (km)	(Tcase) (°C)	
SFP-AGSP-4931-20	1.25	Single-mode fiber	1310/1490(1490/1310)	20	0 to 70	commercial
SFP-AG-SP-4931E-20	1.25	Single-mode fiber	1310/1490(1490/1310)	20	-10 to 80	extended
SFP-AG-SP-4931A-20	1.25	Single-mode fiber	1310/1490(1490/1310)	20	-40 to 85	industrial

## Contact Information

---



### Ascent Communication Technology Ltd

#### AUSTRALIA

140 William Street, Melbourne  
Victoria 3000, AUSTRALIA  
Phone: +61-3-8691 2902

#### CHINA

Unit 1933, 600 Luban Road  
200023, Shanghai CHINA  
Phone: +86-21-60232616

#### EUROPE

Pfarrer-Bensheimer-Strasse 7a  
55129 Mainz, GERMANY  
Phone: +49 (0) 6136 926 3246

#### HONG KONG SAR

Unit 9, 12<sup>th</sup> Floor, Wing Tuck Commercial Centre  
177 Wing Lok Street, Sheung Wan, HONG KONG  
Phone: +852-2851 4722

#### USA

2710 Thomes Ave  
Cheyenne, WY 82001, USA  
Phone: +1-203 816 5188

#### VIETNAM

15 /F TTC Building, Duy Tan Street  
Cau Giay Dist., Hanoi, VIETNAM  
Phone: +84 243 795 5917

**WEB:** [www.ascentcomtec.com](http://www.ascentcomtec.com)

**EMAIL:** [sales@ascentcomtec.com](mailto:sales@ascentcomtec.com)

Specifications and product availability are subject to change without notice.  
Copyright © 2015 Ascent Communication Technology Limited. All rights reserved.  
Ver. ACT\_SFP-AGSP-4931-20\_Datasheet\_V1d\_Sep\_2015