

FTTX Mini Node Deep Fibre Solution

AON121 Series

- **Video Overlay for FTTH/PON network (GPON/ XGS PON)**
- **1002MHz or 1218 MHz RF Spectrum**
- **RF Output up to 83 dB μ V**
- **Compact Housing**
- **Suitable for Home or MDU**
- **Optional PON Pass-Through Port**
- **Low Noise Circuit**
- **Low Power Consumption**
- **Single Fiber WDM option**
- **LED Status Indicators**



AON121 Series FTTH mini node supports Video Overlay application over FTTH optical fiber access network. It operates on 1218MHz RF bandwidth, with high output power up to 83 dB μ V (AGC). AON121 has low power consumption and optional built-in WDM to support PON signal pass-through. It is part of ACT Deep Fiber and FTTH solution, which helps operators provide superior video services in a FTTH PON network architecture.


The AON121 Mini Node adopts high sensitivity optical receiver and specially designed low noise matching circuit. The mini node provides high output and is installed at the subscriber premises, suitable for advanced FTTx, high density MDU, SMB, or hospitality market applications. The AON121 mini node is designed with built in WDM optical passive, which will pass the GPON 1310/1490nm and XGS PON 1270/1577nm data wavelength to the ONU/ONT CPE device.

With the extremely compact housing, modular design, AON121 mini node provides the flexible configuration for MSOs to deliver advanced video services to their customer. This fiber deep product series improve overall network performance, and offer sufficient bandwidth for new application demand.

Key Features

- 1002 or 1218 MHz RF Spectrum for superior video services
- Small form factor and low power consumption
- Low noise circuit (3.5 % modulate, -10 dBm receive, CNR \geq 42dB)
- High output power up to 83 dB μ V for MDU application
- Excellent linearity at wider optical receiving range +2 dBm to -20 dBm
- Flatness less than \pm 1.0 dB in the range of 47 MHz to 1218 MHz
- Metal shell, supply safeguards to opto-electrical sensing device
- Optional built-in WDM provides PON pass-through capability in a FTTH optical passive network
- Powered directly using the power adaptor
- The compact enclosure fits easily in CPE, ONU housing or network termination boxes

Application Diagram

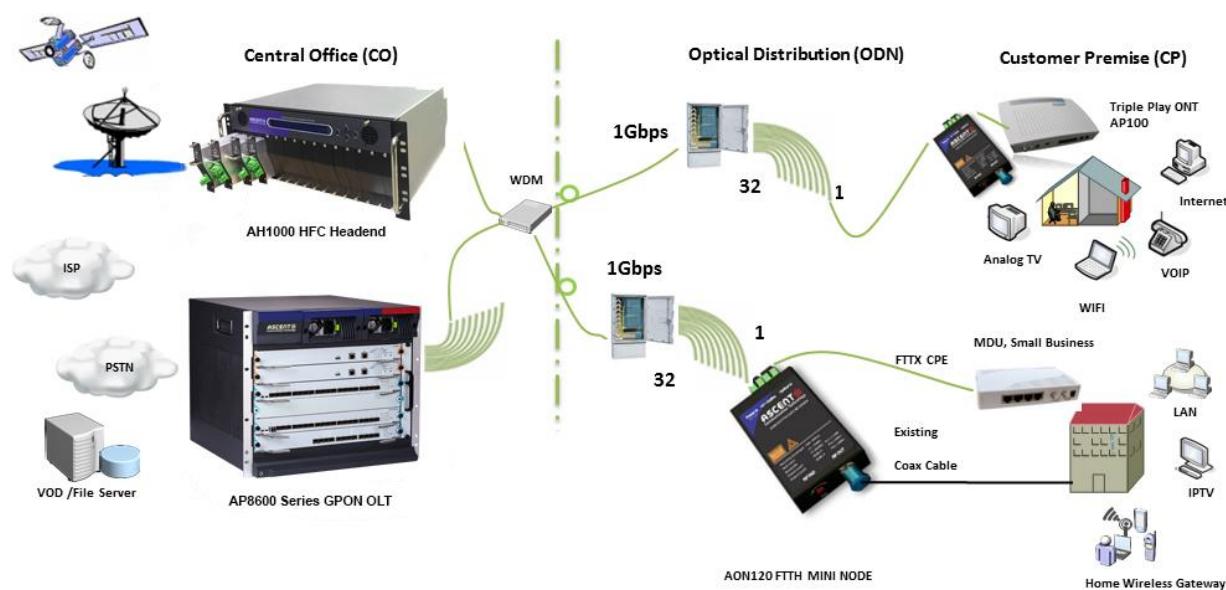

Specifications

AON121 FTTH Deep Fibre Mini Node

Downstream Specifications (Receiver)

CATV Wavelength Range	1540nm to 1560nm (with WDM filter)
	1260nm to 1620nm (without WDM filter)
PON Pass Wavelength	1310/1490nm
Optical Input Power	-20 dBm to +2 dBm (AGC: -10dBm to 0 dBm) -10dBm to 0 dBm (1550 nm LED Green) >0 dBm (1550 nm LED Red Flash) <-10 dBm or no input power (1550 nm LED stay Red)
Optical Return Loss	45 dB (typ.)
WDM IL(optional)	<-0.8dB
Responsivity	≥ 0.9 A/W @ 1550 nm
RF Bandwidth	47 MHz to 1002 MHz, 1218 MHz
Output Level	83dB μ V @ -10 dBm to 0 dBm (AGC)
Output Level Adjustment	0 dB to 20dB
RF Flatness	±1.0dB (47 MHz to 1218MHz)
RF Return Loss	≥14 dB
RF Input Impedance	75 Ω
RF Connector	F-Female


Link Performance

CNR	42.0 dB (-10 dBm input, 96 NTSC, +3.5% OMI)
CTB	-57 dBc
CSO	-57 dBc
MER	38 dB (-10 dBm input, 96 NTSC)

General Specifications

Optical Connector	SC/APC, SC/UPC, LC/PC
Operating Temperature	-20 °C to 50 °C
Storage Temperature	-40 °C to 85 °C
Power Supply	+12 V DC
Operating Relative Humidity	5 % to 95 %
Power Consumption	≤2 W
Dimensions (W x D x H)	48 mm x 88 mm x 22 mm
Weight	0.4 kg
Ship Weight	5 kg (Packed in carton boxes of ten units)

Ordering Information

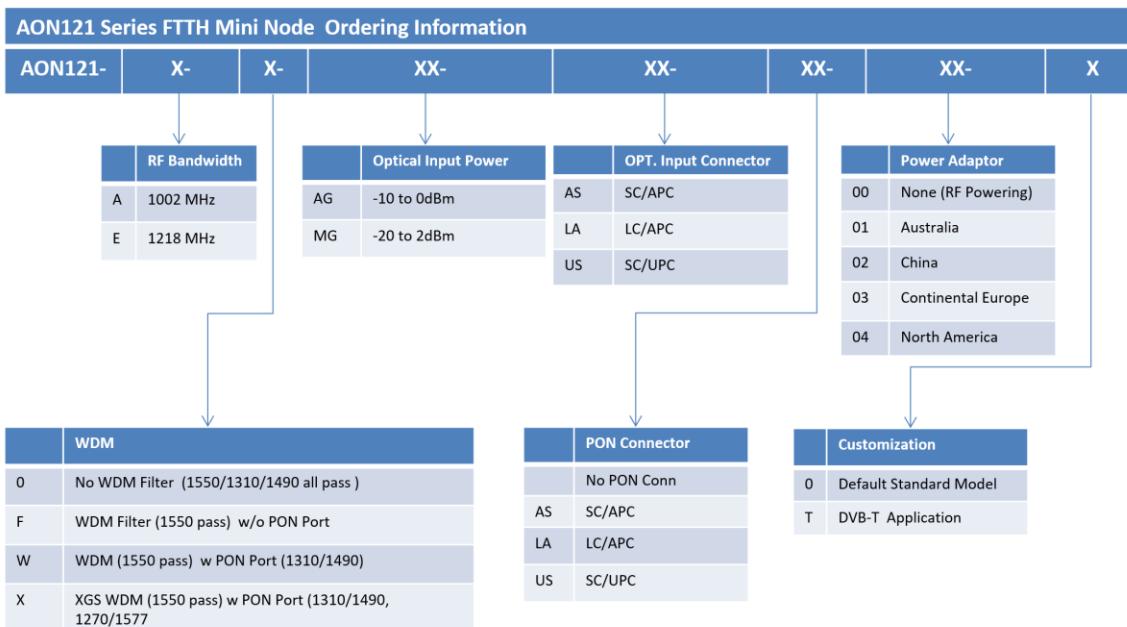

Contact Information -

Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai, CHINA
Phone: +86-21-60232616

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

Hong Kong SAR

Room 1210, 12th Floor, Wing Tuck Commercial Centre
181 Wing Lok Street, Sheung Wan, Hong Kong SAR
Phone: +852-2851 4722

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1 203 350 9822

VIFTNAM

11th Floor, Hoa Binh Office Tower
106 Hoang Quoc Viet Street, Nghia Do Ward
Cau Giay District, Hanoi 10649, VIETNAM
Phone: +84-24-37955917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2026 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT AON121 Mini Node Datasheet V2a May 2021