

## 25 Gbps 1310 nm 80 km SFP28 ZR Transceiver

---

### SFP+ Series



- Supports 25GBASE-ZR
- Supports 25.78G
- Up to 80km transmission on SMF
- High speed I/O electrical interface (25GAUI)
- Single +3.3V power supply
- Complies with EU Directive 2015/863/EU
- Power consumption 2.5 W

Ascent's SFP28-25LP-31-80 optical transceiver supports high-speed serial links over Single Mode (SM) optical fiber at signal rates up to 25.78 Gb/s. The product is compliant with Small Form Pluggable industry agreements SFP and SFP28 for mechanical and low-speed electrical specifications. It is intended for use in interconnect applications between data centers with switches, routers, storage equipment etc. The optical performance supports distances up to 80km.


The transmitter side of the module incorporates one 1310 nm EML and CDR integrated with the EML driver to transport a 25G Ethernet signal and the receiver side is integrated with SOA and PIN- TIA followed by Rx CDR. As stipulated by the 25G Ethernet standards, Forward Error Correction (FEC) is required to be implemented by the host equipment to ensure reliable system operation. The optical parameters below will provide a bit error ratio (BER) of  $5 \times 10^{-5}$  for 25G Ethernet. FEC will provide the required quality for secure service. The electrical interface is according to 25GAUI specifications per IEEE 802.3cc.

Digital diagnostic monitoring information (DDMI) is present in this module per the requirements of SFF-8472, providing real-time monitoring information of transceiver laser, receiver, and environment conditions over an SFF-8419 2-wire serial interface.


## Key Features

- Supports 25GBASE-ZR
- Supports 25.78G
- Up to 80km transmission on SMF
- EML laser and Integrated SOA & PIN TIA rosa
- High speed I/O electrical interface (25GAUI)
- SFP28 MSA package with duplex LC connector
- Single +3.3V power supply
- Power consumption 2.5 W
- Compliant to IEEE 802.3cc, SFF-8472 ver12.4 and SFF-8431
- Complies with EU Directive 2015/863/EU
- Operating Temperature Range:  
Commercial: 0°C to +70°C


## Mechanical Dimension

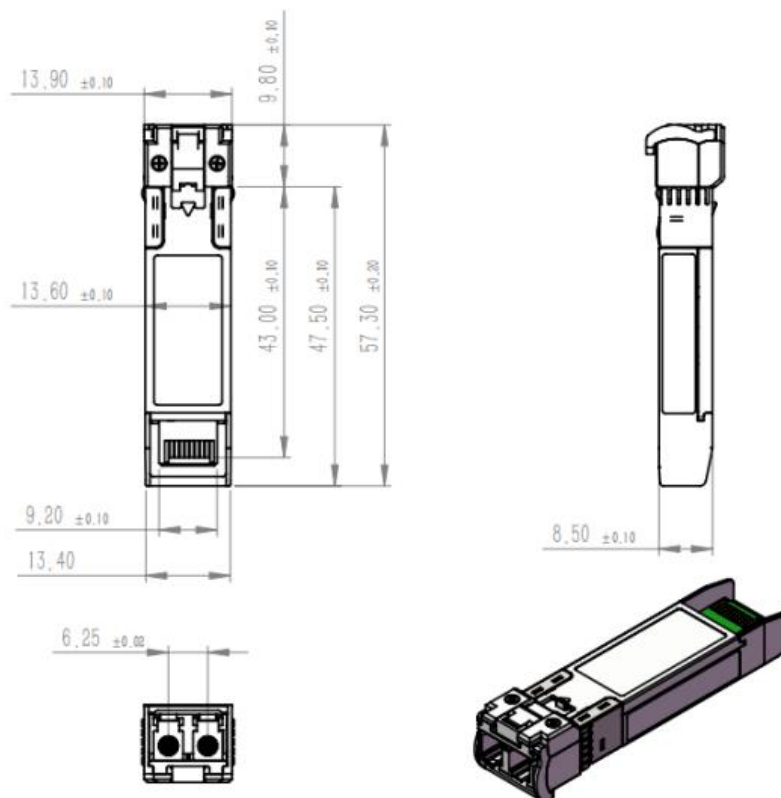

## Recommended Interface Circuit

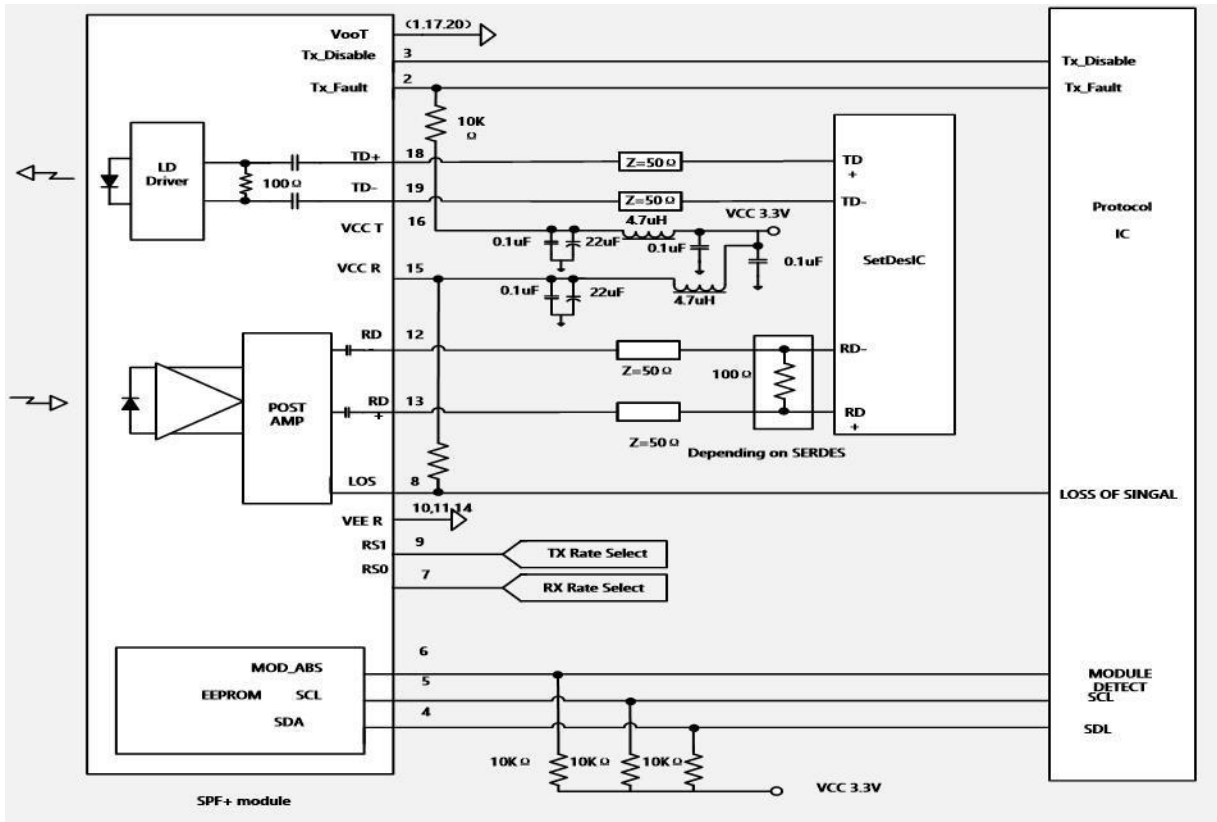

## Pin Assignment

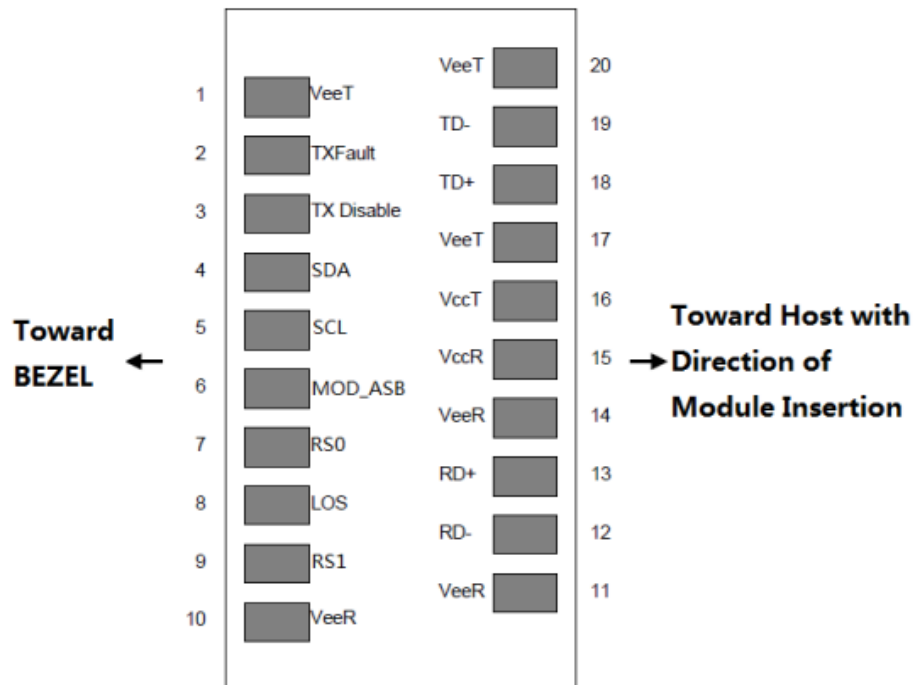

Pin	Symbol	Name/Description	Notes
1	VeeT	Transmitter Ground	1
2	Tx_Fault	Transmitter Fault - High indicates a fault condition	2
3	Tx_Dis	Transmitter Disable - High or open disables the transmitter	
4	SDA	2-wire Serial Interface Data Line (MOD-DEF2)	3
5	SCL	2-wire Serial Interface Clock (MOD-DEF1)	3
6	MOD_DEF0	Module Absent, connected to VeeT or VeeR in the module	
7	RS0	Rate Select 0	5
8	RX_LOS	Receiver Loss of Signal (LVTTTL-O). Logic 0 indicates normal operation	4
9	RS1	Rate Select 1	5
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Inverse Received Data out (CML-O), AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VeeR	Receiver Ground	1
15	VccR	Receiver 3.3V Supply	
16	VccT	Receiver 3.3V Supply	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VeeT	Transmitter Ground	1

**Note:**

1. Module ground pins GND are isolated from the module case.
2. Tx\_Fault is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on Host board.
3. Should be pulled up with 4.7k–10kohms on host board to a voltage between 2.0V and 3.6V.
4. LOS is open collector output. Should be pulled up with 4.7k–10kohms on host board to a voltage between 2.0V and 3.6V.
5. RS0 and RS1 pins are pulled low to GND with a resistor > 30KΩ in module.

## Specifications

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit
Storage Temperature	T <sub>s</sub>	-40		85	°C
Operating Relative Humidity	RH	5		95	%
Supply Voltage	V <sub>cc</sub>	-0.3		3.6	V

### Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Case Temperature	T <sub>c</sub>	0	-	70	°C	
Power Supply Voltage	V <sub>cc</sub>	3.13	3.3	3.46	V	
Power Supply Current	I <sub>cc</sub>	-	-	750	mA	
Maximum Power Dissipation	P <sub>b</sub>	-	-	2.5	W	
Bit Rate	BR		25.78	-	Gb/s	
Transmission Distance	TD		-	80	km	Over SMF

### Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	λ	1295	-	1310	nm	
Average Launch Power	P <sub>av</sub>	2	-	7	dBm	1
Optical Modulation Amplitude	OMA	2	-	8	dBm	
Average Output Power (Laser Turn off)	P <sub>OUT-OFF</sub>	-	-	30	dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
RIN20OMA	RIN	-	-	-130	dB/Hz	
Extinction Ratio	ER	8	-	-	dB	
Transmitter and dispersion penalty (TDP)		-	-	2.7	dB	
Optical Eye Mask			IEEE 802.3 cc			2
<b>Receiver</b>						
Center Wavelength	λ <sub>c</sub>	1295	-	1310	nm	
Receiver sensitivity	R <sub>SEN</sub>			-28	dBm	3
LOS Assert	LOS <sub>A</sub>	-40	-		dBm	
LOS De-assert	LOS <sub>D</sub>	-	-	-29	dBm	
LOS Hysteresis	LOSH	0.5	-	5	dB	

#### Note:

- The optical power is launched into SMF. Average launch power (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
- Measured with a PRBS 231-1 test pattern @25.78125, Hit ratio ≤ 5E-5.
- Measured with a PRBS 231-1 test pattern @25.78125 Gb/s, BER ≤ 5E-5.

## Electrical Characteristics

High-Speed Signal: Compliant to CEI-28G-VSR

Low-Speed Signal: Compliant to SFF-8419

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter (Module Input)						
Differential Data Input Amplitude	V <sub>IN,P-P</sub>	-	-	900	mVpp	
Differential Impedance		90	100	110	Ω	
Tx_Disable	Normal Operation	V <sub>IL</sub>	-0.3	-	0.8	V
	Laser Disable	V <sub>IH</sub>	2.0	-	V <sub>CC</sub> +0.3	V
Receiver (Module Output)						
Differential Data Output Amplitude						
Differential Termination Mismatch(1MHZ)						
Differential Impedance						
Rx_LOS	Normal Operation	V <sub>OL</sub>	-0.3	-	0.4	V
	Loss Signal	V <sub>OH</sub>	2	-	V <sub>CCHOST</sub>	V

## Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	0 to 70	±3	°C	Internal
Voltage	3.13 to 3.47	±3%	V	Internal
Tx Bias Current Per Lane	0 to 100	±10%	mA	Internal
Tx Output Power Per Lane	2 to 7	±3	dBm	Internal
Rx Power	-28 to -4	±3	dBm	Internal

## Ordering Information

Product Name	Product Description
SFP28-25LP-31-80	SFP28 plug-in, 25 Gbps, ZR, 80 km, TX=1310/RX, on two single mode fibres, LC/PC
S28-25LP-31-80A	SFP28 plug-in, 25 Gbps, ZR, 80 km, TX=1310/RX, on two single mode fibres, LC/PC, Industrial Temperature

## Contact Information

---



### Ascent Communication Technology Ltd

#### AUSTRALIA

140 William Street, Melbourne  
Victoria 3000, AUSTRALIA  
Phone: +61-3-8691 2902

#### CHINA

Unit 1933, 600 Luban Road  
200023, Shanghai, CHINA  
Phone: +86-21-60232616

#### EUROPE

Pfarrer-Bensheimer-Strasse 7a  
55129 Mainz, GERMANY  
Phone: +49 (0) 6136 926 3246

**WEB:** [www.ascentcomtec.com](http://www.ascentcomtec.com)

#### Hong Kong SAR

Unit 9, 12<sup>th</sup> Floor, Wing Tuck Commercial Centre  
177 Wing Lok Street, Sheung Wan, Hong Kong SAR  
Phone: +852-2851 4722

#### USA

2710 Thomes Ave  
Cheyenne, WY 82001, USA  
Phone: +1 203 350 9822

#### VIETNAM

11th Floor, Hoa Binh Office Tower  
106 Hoang Quoc Viet Street, Nghia Do Ward  
Cau Giay District, Hanoi 10649, VIETNAM  
Phone: +84-24-37955917

**EMAIL:** [sales@ascentcomtec.com](mailto:sales@ascentcomtec.com)

Specifications and product availability are subject to change without notice.  
Copyright © 2024 Ascent Communication Technology Limited. All rights reserved.  
Ver. ACT\_SFP28-25LP-31-80\_Datasheet\_V1c\_Jul\_2022