


High Quality Fiber Optic Patch Cord

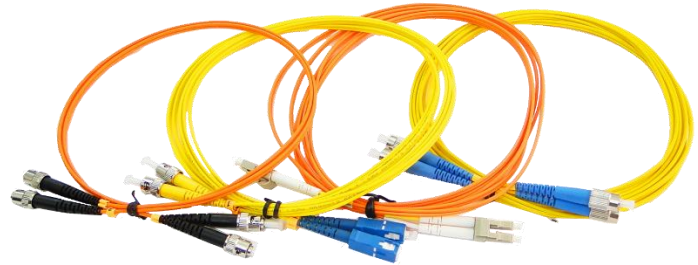

- **High quality zirconia ferrules**
- **Good repeatability and interchangeability**
- **LC/SC/ST/FC/LSH/MTRJ/MU connectors with standard boots are available**
- **LC connectors with 12mm/18mm and SC connectors with 25mm short boots are available**
- **Flame-retardant, rugged and durable jacket**
- **OS2/OM5/OM4/OM3/OM2/OM1 are available**
- **Factory terminated and tested for insertion loss, return loss and end face**

Ascent's fiber optic patch cords make high speed ethernet network equipment connections. They provide superior connections from the workstation to the wall outlet, or from active equipment to the patch panel. These applications include connecting to network interface cards (NIC), or to a fiber hub, router, or switch.

Designed for data center, enterprise, FTTx, LAN and WAN, CATV network, telecom network applications, etc. requiring quick infrastructure deployment such as main, horizontal, and zone distribution areas.

Fiber optic patch cords are ideal for supporting high speed telecommunication network fiber applications. They are manufactured and tested in compliance with TIA 604 (FOCIS), IEC 61754 and YD/T industry standards.

OM1, OM2, OM3, OM4, OM5 or OS2 fiber types are available to meet the demand of Gigabit Ethernet, 10 Gigabit Ethernet and high speed Fiber Channel. Every termination is through rigorous parameter test to ensure the highest network performance.


Key Features

- High quality zirconia ferrules
- Good repeatability and interchangeability
- LC/SC/ST/FC/LSH/MTRJ/MU connectors with standard boots are available
- LC connectors with 12mm/18mm and SC connectors with 25mm short boots are available
- Flame-retardant, rugged and durable jacket
- OS2/OM5/OM4/OM3/OM2/OM1 are available
- Factory terminated and tested for insertion loss, return loss and end face

Standard Compliance

- RoHS, ISO 9001, CE, REACH, WEEE Compliant
- TIA 604 (FOCIS)
- EIA/TIA, Telcordia standards
- IEC 61754
- IEC 60793-2-10
- IEC 61300-3-35
- YD/T1272.1-2003

Technical Drawing

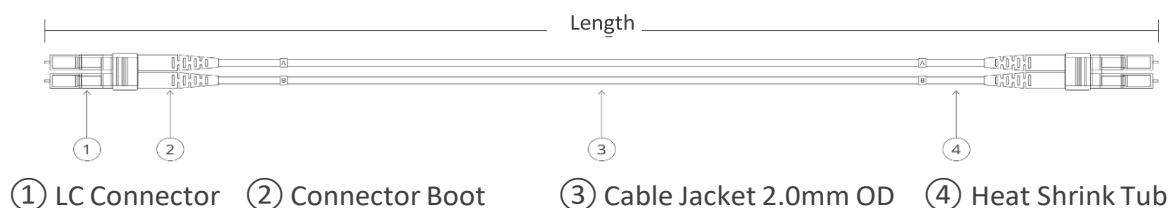

* The total length of this cable is the distance from the connector ferrule at one end to the ferrule at the other end.

Fiber Optic Connectors Guidance

1. LC



Long Form

Lucent Connector/Little Connector/Local Connector

Typical Applications

High-density connections, SFP and SFP+ transceivers,
XFP transceivers

2. SC



Long Form

Subscriber Connector/Square Connector/Standard Connector

Typical Applications

Datacom and telecom; GPON; EPON; GBIC

3. FC



Long Form

Ferrule Connector or Fiber Channel

Typical Applications

Datacom, telecom, measurement equipment,
single mode lasers Datacom

4. ST



Long Form

Straight Tip

Typical Applications

Datacom

5. LSH



Typical Applications

Telecom, DWDM systems

6. MU



Long Form

Miniature Unit

Typical Applications

LANs and telecommunication networks

Specifications

Physical Characteristics	Name
Connector Types	LC/SC/ST/FC/LSH/MTRJ/MU with Standard Boots; LC 12mm/18mm with Short Boots; SC 25mm with Short Boots
Polish Type	SMF: UPC-UPC; UPC-APC; APC-APC; MMF: UPC-UPC
Connector Ferrule	Zirconia Ceramic
Cable Outside Diameter	Duplex: 1.6/2.0/3.0mm, Simplex: 0.9/2.0/3.0mm
Wavelength	Single-mode: 1310/1550 nm Multi-mode: 850/1300 nm
Interchangeability	≤0.2dB
Vibration	≤0.2dB

Mechanical Characteristics	Description
Fiber Type	Standard Boots: OS2/OM5/OM4/OM3/OM2/OM1; Short Boots: OS2/OM4/OM3
Fiber Mode	Single-mode: OS2 9/125 μm Multi-mode: OM4 50/125 μm, OM3 50/125μm
Fiber Count	Duplex/Simplex
Cable Jacket	PVC (Riser/OFNR)/LSZH/Plenum (OFNP)
Fiber Grade	SMF: G.657.A1/ G.657.A2; OM5/OM4/OM3/OM2: Bend Insensitive; OM1: G.651

Fiber Mode	Connector Type	Connector Color	Jacket Color
OS2	LC	Blue/Green Black	Yellow
	SC		
	ST		
	FC		
OM1/OM2	LC	Beige	Orange
	SC	Black	
	ST		
OM3	LC	Beige	Aqua
	SC	Aqua	
	ST	Black	
OM4	LC	Beige	Aqua
	SC	Beige	Aqua
OM5	LC	Beige	Lime Green
Vibration	≤0.2dB	≤0.2dB	≤0.2dB
Minimum Bend Radius		SMF	MMF
	OD 2.0/3.0mm	10/5D	20/10D
	Fiber Cable (Dynamic/Static)	OD 1.6mm	10/5D
	OD 0.9mm	10mm	-
			OM1: 15mm Others: 7.5mm

Fiber Core	OD0.9/2.0/3.0mm	G.657.A1: 10mm G.657.A2: 7.5mm	OM1: 15mm Others: 7.5mm
	OD1.6mm	G.657.A1: 10mm	-

Tensile Strength (Long Term/Short Term)	Duplex	Simplex
OD 3.0mm	120/225N	80/150N
OD 2.0mm	90/150N	60/100N
OD 1.6mm	90/150N	-
OD 0.9mm	-	3/6N

Optical Characteristics	Description
Connector Insertion Loss	LC/SC/ST/FC/LSH/MU/MTRJ≤0.3dB
Connector Return Loss	SMF: UPC≥50dB, APC≥60dB (LC/SC/ST/FC/MU/MTRJ), UPC≥55dB, APC≥75dB (LSH) MMF: UPC≥30dB (LC/SC/ST/FC/LSH/MU), UPC≥35 (MTRJ)
Attenuation at 1310nm	G.657.A1: 0.36dB/km G.657.A2: 0.4dB/km
Attenuation at 1550nm	G.657.A1: 0.22dB/km G.657.A2: 0.25dB/km
Attenuation at 850nm	3.0dB/km
Attenuation at 1300nm	1.0dB/km

Environmental Characteristics	Description
Operating Temperature	-20~70°C
Storage Temperature	-40~80°C

Cable Length Tolerances

Cable Length	Duplex/Simplex	Multifiber
L≤0.5m	+5cm/-0cm	+8cm/-0cm
0.5m<L≤5m	+10cm/-0cm	+12cm/-0cm
5m<L≤10m	+15cm/-0cm	+15cm/-0cm
10m<L≤30m	+20cm/-0cm	+20cm/-0cm
30m<L≤100	+1%/-0cm	+1%/-0cm
L>100m	+1.5%/-0cm	+1.5%/-0cm

Ordering Information

PCD series Patch Cord Ordering Information																																																																									
PCD-XX-		XX-		XXX-		X		X-		X-		XXX																																																													
↓		↓		↓		↓		↓		↓		↓																																																													
<table><tr><th></th><th>Connector A</th></tr><tr><td>SA</td><td>SC/APC</td></tr><tr><td>TA</td><td>ST/APC</td></tr><tr><td>SU</td><td>SC/UPC</td></tr><tr><td>TU</td><td>ST/UPC</td></tr><tr><td>FA</td><td>FC/APC</td></tr><tr><td>FU</td><td>FC/UPC</td></tr><tr><td>LA</td><td>LC/APC</td></tr><tr><td>LU</td><td>LC/UPC</td></tr><tr><td>LP</td><td>LC/PC</td></tr><tr><td>SP</td><td>SC/PC</td></tr></table>			Connector A	SA	SC/APC	TA	ST/APC	SU	SC/UPC	TU	ST/UPC	FA	FC/APC	FU	FC/UPC	LA	LC/APC	LU	LC/UPC	LP	LC/PC	SP	SC/PC			<table><tr><th></th><th>Fiber Mode</th></tr><tr><td>OS2</td><td></td></tr><tr><td>OM1</td><td></td></tr><tr><td>OM2</td><td></td></tr><tr><td>OM3</td><td></td></tr><tr><td>OM4</td><td></td></tr><tr><td>OM5</td><td></td></tr></table>			Fiber Mode	OS2		OM1		OM2		OM3		OM4		OM5				<table><tr><th></th><th>Cable Diameter</th></tr><tr><td>2</td><td>2mm</td></tr><tr><td>3</td><td>3mm</td></tr><tr><td>B</td><td>900μm jacketed</td></tr></table>			Cable Diameter	2	2mm	3	3mm	B	900μm jacketed			<table><tr><th></th><th>Cable Length</th></tr><tr><td>003</td><td>3 meters</td></tr><tr><td>005</td><td>5 meters</td></tr><tr><td>010</td><td>10 meters</td></tr><tr><td>050</td><td>50 meters</td></tr><tr><td>100</td><td>100 meters</td></tr><tr><td>500</td><td>500 meters</td></tr></table>			Cable Length	003	3 meters	005	5 meters	010	10 meters	050	50 meters	100	100 meters	500	500 meters		
	Connector A																																																																								
SA	SC/APC																																																																								
TA	ST/APC																																																																								
SU	SC/UPC																																																																								
TU	ST/UPC																																																																								
FA	FC/APC																																																																								
FU	FC/UPC																																																																								
LA	LC/APC																																																																								
LU	LC/UPC																																																																								
LP	LC/PC																																																																								
SP	SC/PC																																																																								
	Fiber Mode																																																																								
OS2																																																																									
OM1																																																																									
OM2																																																																									
OM3																																																																									
OM4																																																																									
OM5																																																																									
	Cable Diameter																																																																								
2	2mm																																																																								
3	3mm																																																																								
B	900μm jacketed																																																																								
	Cable Length																																																																								
003	3 meters																																																																								
005	5 meters																																																																								
010	10 meters																																																																								
050	50 meters																																																																								
100	100 meters																																																																								
500	500 meters																																																																								
↓		↓		↓		↓		↓		↓																																																															
<table><tr><th></th><th>Connector B</th></tr><tr><td>SA</td><td>SC/APC</td></tr><tr><td>TA</td><td>ST/APC</td></tr><tr><td>SU</td><td>SC/UPC</td></tr><tr><td>TU</td><td>ST/UPC</td></tr><tr><td>FA</td><td>FC/APC</td></tr><tr><td>FU</td><td>FC/UPC</td></tr><tr><td>LA</td><td>LC/APC</td></tr><tr><td>LU</td><td>LC/UPC</td></tr><tr><td>LP</td><td>LC/PC</td></tr><tr><td>SP</td><td>SC/PC</td></tr></table>			Connector B	SA	SC/APC	TA	ST/APC	SU	SC/UPC	TU	ST/UPC	FA	FC/APC	FU	FC/UPC	LA	LC/APC	LU	LC/UPC	LP	LC/PC	SP	SC/PC			<table><tr><th></th><th>Fiber Count</th></tr><tr><td>S</td><td>Simplex</td></tr><tr><td>D</td><td>Duplex</td></tr></table>			Fiber Count	S	Simplex	D	Duplex			<table><tr><th></th><th>Cable Jacket</th></tr><tr><td>LSZH</td><td></td></tr><tr><td>OFNP</td><td></td></tr><tr><td>PVC</td><td></td></tr></table>			Cable Jacket	LSZH		OFNP		PVC																													
	Connector B																																																																								
SA	SC/APC																																																																								
TA	ST/APC																																																																								
SU	SC/UPC																																																																								
TU	ST/UPC																																																																								
FA	FC/APC																																																																								
FU	FC/UPC																																																																								
LA	LC/APC																																																																								
LU	LC/UPC																																																																								
LP	LC/PC																																																																								
SP	SC/PC																																																																								
	Fiber Count																																																																								
S	Simplex																																																																								
D	Duplex																																																																								
	Cable Jacket																																																																								
LSZH																																																																									
OFNP																																																																									
PVC																																																																									

References Part Numbers*

*Contact your local sales representatives for more configuration

PCD-LP-SP-OS2-D2-LSZH-020

Optical Patch Cord LC/PC to SC/PC, Single Mode Fiber, Duplex, 2mm, LSZH 20m

Contact Information



Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

Hong Kong SAR

Room 1210, 12th Floor, Wing Tuck Commercial Centre
181 Wing Lok Street, Sheung Wan , Hong Kong SAR
Phone: +852-2851 4722

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai, CHINA
Phone: +86-21-60232616

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1 203 350 9822

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

VIETNAM

11th Floor, Hoa Binh Office Tower
106 Hoang Quoc Viet Street, Nghia Do Ward
Cau Giay District, Hanoi 10649, VIETNAM
Phone: +84-24-37955917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2026 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_Fiber_Patchcord_Datasheet_V2c_Jan_2022