

Mini Node Deep Fiber FTTH Solution

AON120D Series



- **Video Overlay for FTTH/PON network (1218MHz)**
- **1550 nm CATV wavelength**
- **1310/1490 nm PON wavelength compatible**
- **1270/1577 XGSPON wavelength compatible**
- **-15 dBm to +2 dBm optical receiving range**
- **76 dBμV RF output power with AGC range**
- **LED indicators**
- **Low power consumption**
- **Compact form factor**

AON120D Series FTTH mini node supports Video Overlay application over FTTH optical fiber access network. It operates on 42 MHz to 1218 MHz RF bandwidth, with high output power up to 76 dBμV (AGC). AON120D has low power consumption and optional built-in WDM to support PON signal pass-through. It is part of ACT's Deep Fiber and FTTH solution, which helps operators provide superior video services in a FTTH PON network architecture.


The AON120D Mini Node adopts high sensitivity optical receiver and specially designed low noise matching circuit. The mini node provides high output and is installed at the subscriber premises, suitable for advanced FTTx, high density MDU, SMB, or hospitality market applications. The AON120 mini node is designed with built in WDM optical passive, which will pass the 1310/1490nm PON and 1270/1577nm XGSPON data wavelength to the ONU/ONT CPE device.

With the compact housing, modular design, AON120D mini node provides the flexible configuration for MSOs to deliver advanced video services to their customer. This fiber deep product series improve overall network performance, and offer sufficient bandwidth for new application demand.

Key Features

- 1218 MHz RF Spectrum for superior video services
- Small form factor and low power consumption
- 1550 nm CATV wavelength
- 1310/1490 nm PON wavelength
- 1270/1577 XGSPON wavelength
- Wide optical receiving range: -15 dBm to +2 dBm
- Optical AGC to keep constant output level in different optical input power
- RF output level: 76 dBμV @ -12 dBm optical input power
- LED indicator for optical power and power supply
- Powered directly using the power adaptor
- Compact enclosure fits easily in CPE, ONU housing or network termination boxes
- Special heat dissipation design

Application Diagram

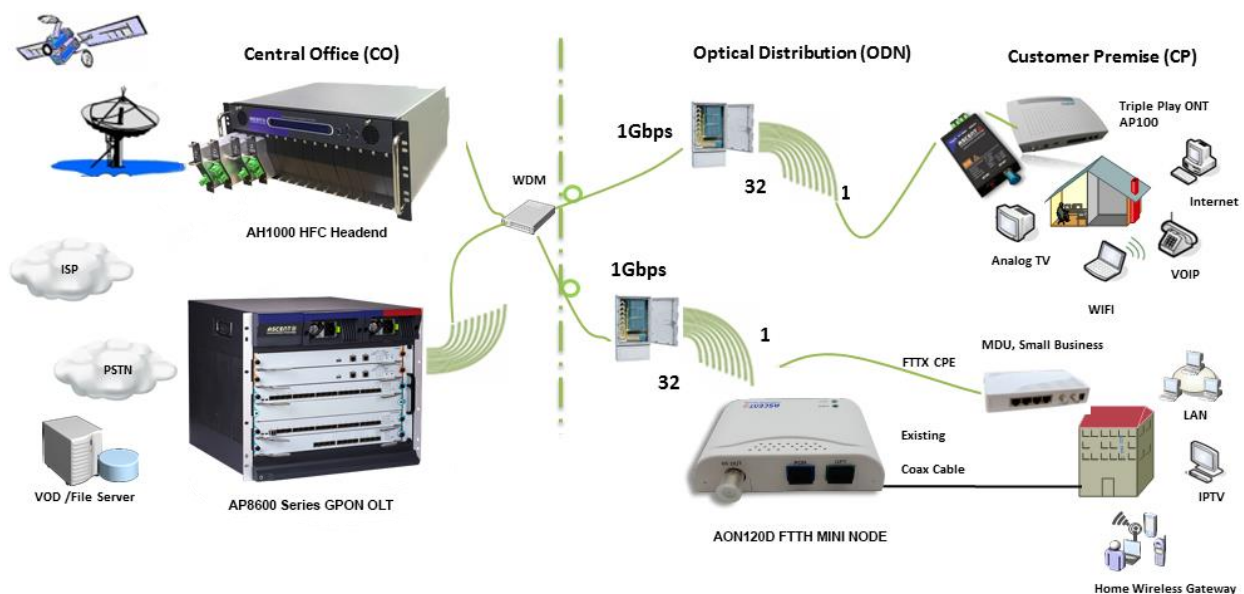

Specifications

Optical Parameters

Operational Wavelength	1260 nm to 1620 nm	
CATV Wavelength	1540 nm to 1560 nm	
	1310 nm (optional, no WDM)	
Reflection Wavelength (Optional)	1270 nm to 1530 nm and 1570 nm to 1620 nm	Available for GPON 1310/1490 and XGSPON 1270/1577
Insertion Loss (COM to Reflection Port)	≤1.0 dB	
Channel Isolation @ 1550 nm	≥30 dB	
Channel Isolation @Reflection Band	≥15 dB	
Optical Input Power	-15 dBm to +2 dBm	
AGC Range	-12 dBm to +2 dBm	
Optical Return Loss	≥50 dB	
Optical Fiber Connector	SC/APC or others SC/PC or others	COM port Reflection port


RF Parameters

Operational Bandwidth	47 MHz to 1002/1218 MHz	
Flatness	≤±1.0 dB	47 MHz to 1002 MHz
Output Level	76 dBμV ± 1 dBμV	AGC range
Return Loss	≥16 dB	47 MHz to 1002 MHz
Output Impedance	75 Ω	
C/N	≥43	-9dBm optical input power,
C/CSO	≥55	optical input level transmitter
C/CTB	≥55	82 dBμV @ 60 PAL, OMI 3.5 %
MER	≥34 dB	Pin = -12 dBm
BER	<1.0E-9	Pin: 0 dBm to -15 dBm
Output Port Number	1	
RF Tie-in RF	F-Female	

General Characteristics

Power Adapter	+12 V _{DC}
Power Consumption	≤2 W
Operating Temperature	-10 °C to +50 °C
Storage Temperature	-40 °C to +85 °C
Operating Relative Humidity	5 % to 95 %
Dimensions (L×W×H)	73 mm × 60 mm × 23 mm

Ordering Information

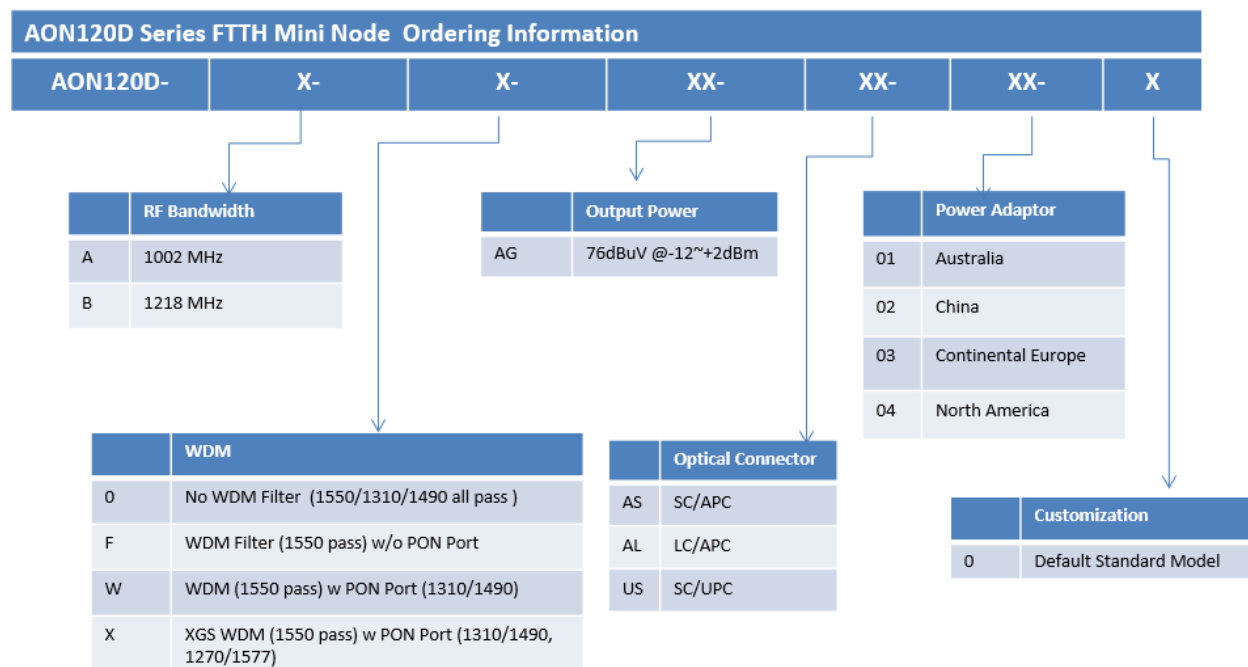

Contact Information

Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai CHINA
Phone: +86-21-60232616

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

HONG KONG SAR

Unit 9, 12th Floor, Wing Tuck Commercial Centre
177 Wing Lok Street, Sheung Wan, HONG KONG
Phone: +852-2851 4722

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1-203 816 5188

VIETNAM

15 /F TTC Building, Duy Tan Street
Cau Giay Dist., Hanoi, VIETNAM
Phone: +84 243 795 5917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2022 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_AON120D_Mini_Node_Datasheet_V1h_Jan_2022