

FTTX Mini Node Deep Fibre Solution

AON121 Series

- **Video Overlay for FTTH/PON network (GPON/ XGS PON)**
- **1218 MHz RF Spectrum**
- **RF Output up to 83 dBμV**
- **Compact Housing**
- **Suitable for Home or MDU**
- **Optional PON Pass-Through Port**
- **Low Noise Circuit**
- **Low Power Consumption**
- **Single Fiber WDM option**
- **LED Status Indicators**



AON121 Series FTTH mini node supports Video Overlay application over FTTH optical fiber access network. It operates on 1218MHz RF bandwidth, with high output power up to 83 dBμV (AGC). AON121 has low power consumption and optional built-in WDM to support PON signal pass-through. It is part of ACT Deep Fiber and FTTH solution, which helps operators provide superior video services in a FTTH PON network architecture.


The AON121 Mini Node adopts high sensitivity optical receiver and specially designed low noise matching circuit. The mini node provides high output and is installed at the subscriber premises, suitable for advanced FTTx, high density MDU, SMB, or hospitality market applications. The AON121 mini node is designed with built in WDM optical passive, which will pass the GPON 1310/1490nm and XGS PON 1270/1577nm data wavelength to the ONU/ONT CPE device.

With the extremely compact housing, modular design, AON121 mini node provides the flexible configuration for MSOs to deliver advanced video services to their customer. This fiber deep product series improve overall network performance, and offer sufficient bandwidth for new application demand.

Key Features

- 1002or 1218 MHz RF Spectrum for superior video services
- Small form factor and low power consumption
- Low noise circuit (3.5 % modulate, -10 dBm receive, CNR \geq 42dB)
- High output power up to 74 dB μ V for MDU application
- Excellent linearity at wider optical receiving range +2 dBm to -20 dBm
- Flatness less than ± 1.0 dB in the range of 47 MHz to 1002 MHz
- Metal shell, supply safeguards to opto-electrical sensing device
- Optional built-in WDM provides PON pass-through capability in a FTTH optical passive network
- Powered directly using the power adaptor
- The compact enclosure fits easily in CPE, ONU housing or network termination boxes

Application Diagram

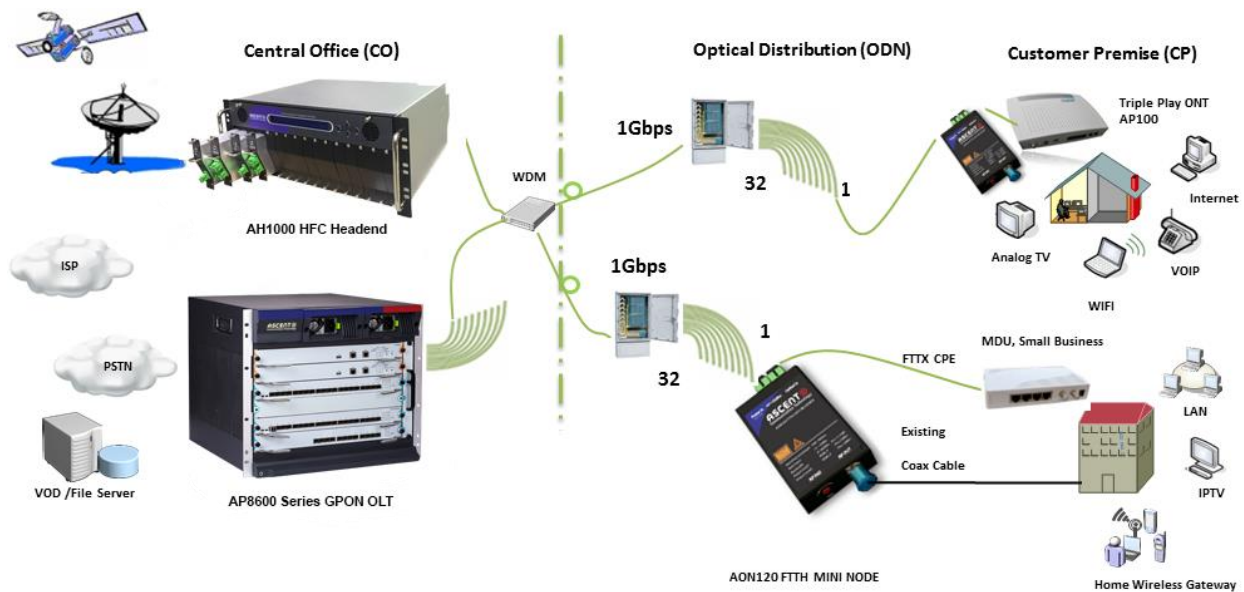

Specifications

AON121 FTTH Deep Fibre Mini Node

Downstream Specifications (Receiver)

CATV Wavelength Range	1540 nm to 1560 nm (with WDM filter) 1310/1490/1550 nm all pass (without WDM filter)
Optical Input Power	-20 dBm to +2 dBm (AGC: -10 dBm to 0 dBm) -10 dBm to 0 dBm (1550 nm LED Green) <-18 dBm (1550 nm LED Red)
Optical Return Loss	45 dB (typ.)
WDM Insertion Loss (optional)	<-0.8 dB
Responsivity	≥0.9 A/W @ 1550 nm
RF Bandwidth:	47 MHz to 1002 MHz, 1218 MHz
Output Level	83 dBμV @ -10 dBm to 0 dBm (AGC)
Output Level Adjustment	0 dB to 20 dB
RF Flatness	±0.1 dB (47 MHz to 1002 MHz)
RF Return Loss	≥14 dB
RF Input Impedance	75 Ω
RF Connector	F-Female

Link Performance

CNR	42.0 dB (-10 dBm input, 96 NTSC, +3.5% OMI)
CTB	-57 dBc
CSO	-57 dBc
MER	38 dB (-10 dBm input, 96 NTSC)

General Specifications

Optical Connector	SC/APC, SC/UPC, LC/PC
Operating Temp	-20 °C to +50 °C
Storage Temp	-40 °C to +85 °C
Power Supply	+12 V _{DC}
Operating Relative Humidity	5 % to 95 % RH (non-condensing)
Power Consumption	≤2 W
Dimensions (W × D × H)	48 mm × 88 mm × 22 mm
Weight	0.4 kg
Ship Weight	5 kg (Packed in carton boxes of ten units)

Ordering Information

AON121 Series FTTH Mini Node Ordering Information																														
AON121-	X-	X-	XX-	XX-	XX-	X																								
	<div><table><tr><th></th><th>RF Bandwidth</th></tr><tr><td>A</td><td>1002 MHz</td></tr><tr><td>E</td><td>1218 MHz</td></tr></table></div>		RF Bandwidth	A	1002 MHz	E	1218 MHz	<div><table><tr><th></th><th>Output Power</th></tr><tr><td>AG</td><td>82dBuV @-7~3dBm</td></tr><tr><td>MG</td><td>82dBuV @-2dBm</td></tr></table></div>		Output Power	AG	82dBuV @-7~3dBm	MG	82dBuV @-2dBm	<div><table><tr><th></th><th>Power Adaptor</th></tr><tr><td>00</td><td>None (RF Powering)</td></tr><tr><td>01</td><td>Australia</td></tr><tr><td>02</td><td>China</td></tr><tr><td>03</td><td>Continental Europe</td></tr><tr><td>04</td><td>North America</td></tr></table></div>		Power Adaptor	00	None (RF Powering)	01	Australia	02	China	03	Continental Europe	04	North America			
	RF Bandwidth																													
A	1002 MHz																													
E	1218 MHz																													
	Output Power																													
AG	82dBuV @-7~3dBm																													
MG	82dBuV @-2dBm																													
	Power Adaptor																													
00	None (RF Powering)																													
01	Australia																													
02	China																													
03	Continental Europe																													
04	North America																													
	<div><table><tr><th></th><th>WDM</th></tr><tr><td>O</td><td>No WDM Filter (1550/1310/1490 all pass)</td></tr><tr><td>F</td><td>WDM Filter (1550 pass) w/o PON Port</td></tr><tr><td>W</td><td>WDM (1550 pass) w PON Port (1310/1490)</td></tr><tr><td>X</td><td>XGS WDM (1550 pass) w PON Port (1310/1490, 1270/1577</td></tr></table></div>		WDM	O	No WDM Filter (1550/1310/1490 all pass)	F	WDM Filter (1550 pass) w/o PON Port	W	WDM (1550 pass) w PON Port (1310/1490)	X	XGS WDM (1550 pass) w PON Port (1310/1490, 1270/1577	<div><table><tr><th></th><th>Optical Connector</th></tr><tr><td>AS</td><td>SC/APC</td></tr><tr><td>AL</td><td>LC/APC</td></tr><tr><td>US</td><td>SC/UPC</td></tr></table></div>		Optical Connector	AS	SC/APC	AL	LC/APC	US	SC/UPC		<div><table><tr><th></th><th>Customization</th></tr><tr><td>O</td><td>Default Standard Model</td></tr><tr><td>T</td><td>DVB-T Application</td></tr></table></div>		Customization	O	Default Standard Model	T	DVB-T Application		
	WDM																													
O	No WDM Filter (1550/1310/1490 all pass)																													
F	WDM Filter (1550 pass) w/o PON Port																													
W	WDM (1550 pass) w PON Port (1310/1490)																													
X	XGS WDM (1550 pass) w PON Port (1310/1490, 1270/1577																													
	Optical Connector																													
AS	SC/APC																													
AL	LC/APC																													
US	SC/UPC																													
	Customization																													
O	Default Standard Model																													
T	DVB-T Application																													

Contact Information

Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai CHINA
Phone: +86-21-60232616

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

HONG KONG SAR

Unit 9, 12th Floor, Wing Tuck Commercial Centre
177 Wing Lok Street, Sheung Wan, HONG KONG
Phone: +852-2851 4722

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1-203 816 5188

VIETNAM

15 /F TTC Building, Duy Tan Street
Cau Giay Dist., Hanoi, VIETNAM
Phone: +84 243 795 5917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2021 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_AON121_Mini_Node_Datasheet_V1o_May_2021